



11. SAR and optical remote sensing for post-flood assessment and recovery




SAR and optical for flood/postflood mapping

RADAR SATELLITES

Weather & illumination independence
Penetration through cloud cover

Use: Detection of water surfaces
Changes in water levels

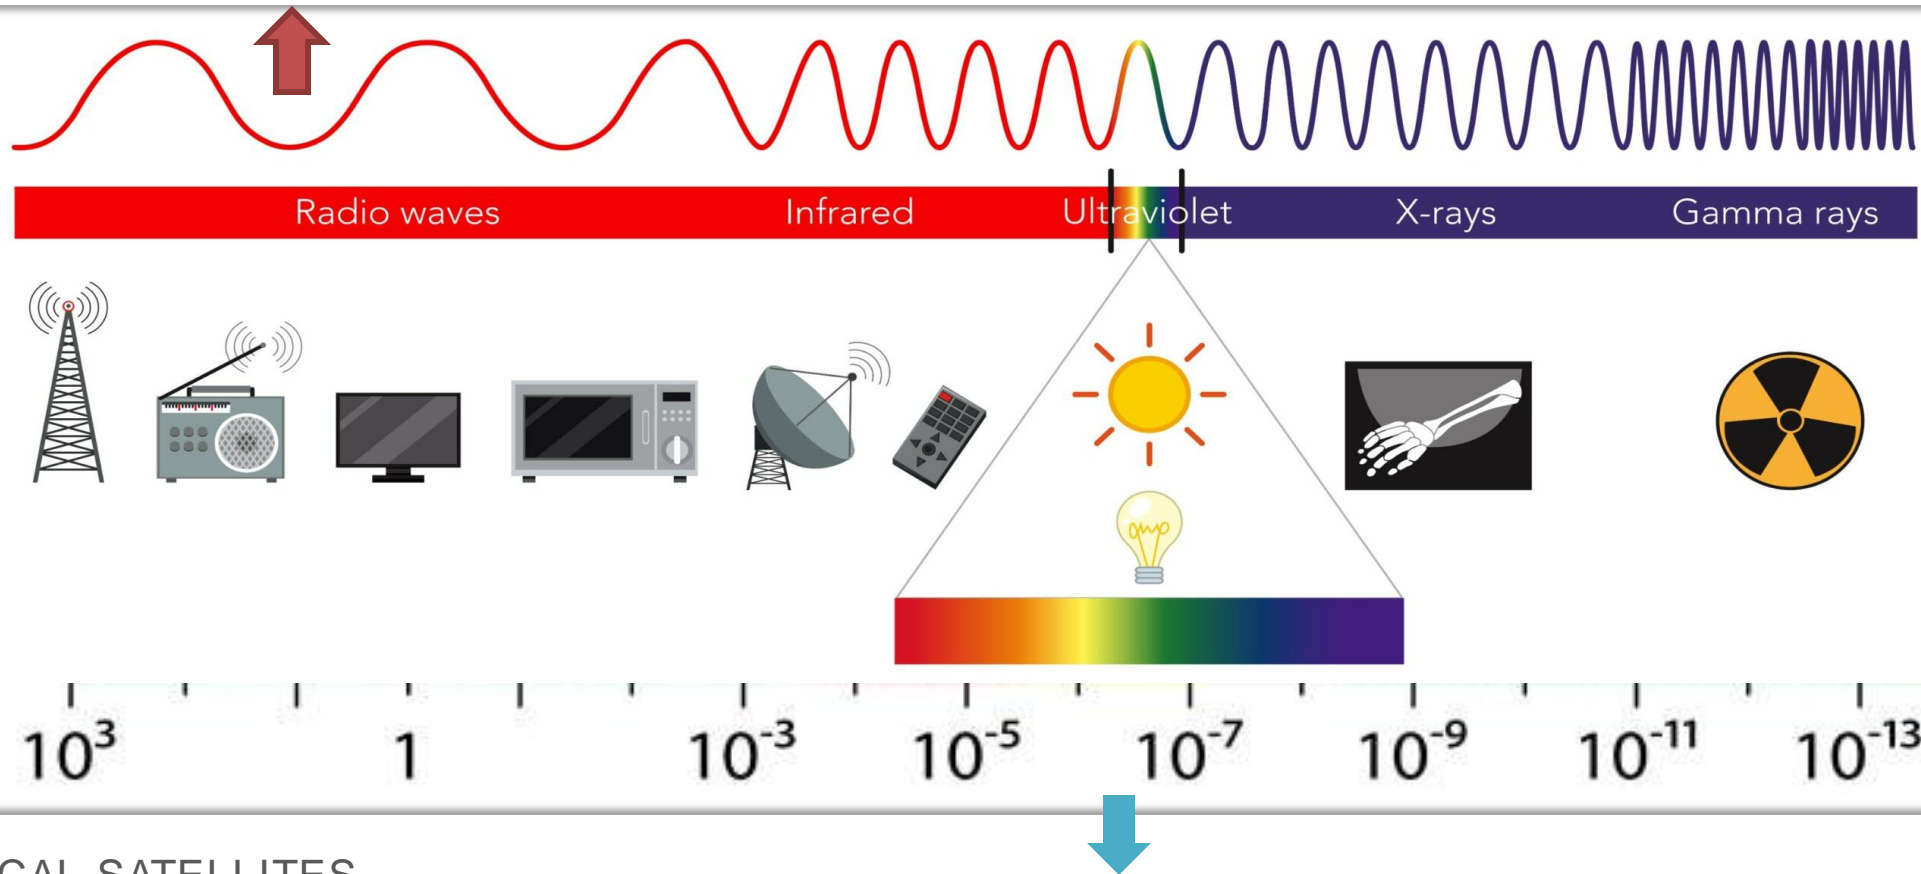

OPTICAL SATELLITES



Weather & illumination dependence
No penetration through cloud cover

Use: Flood extent, flood patterns, flood impacts
Analyzing changes before and after flooding events

Source: <https://cthrumetals.com/emi-shielding/>

SAR and optical for flood/postflood mapping

Radar satellites, unlike optical ones, utilize microwave radar technology to capture data, enabling them to penetrate through clouds and atmospheric barriers. This distinct capability allows radar satellites to acquire flood mapping data even in adverse weather conditions.

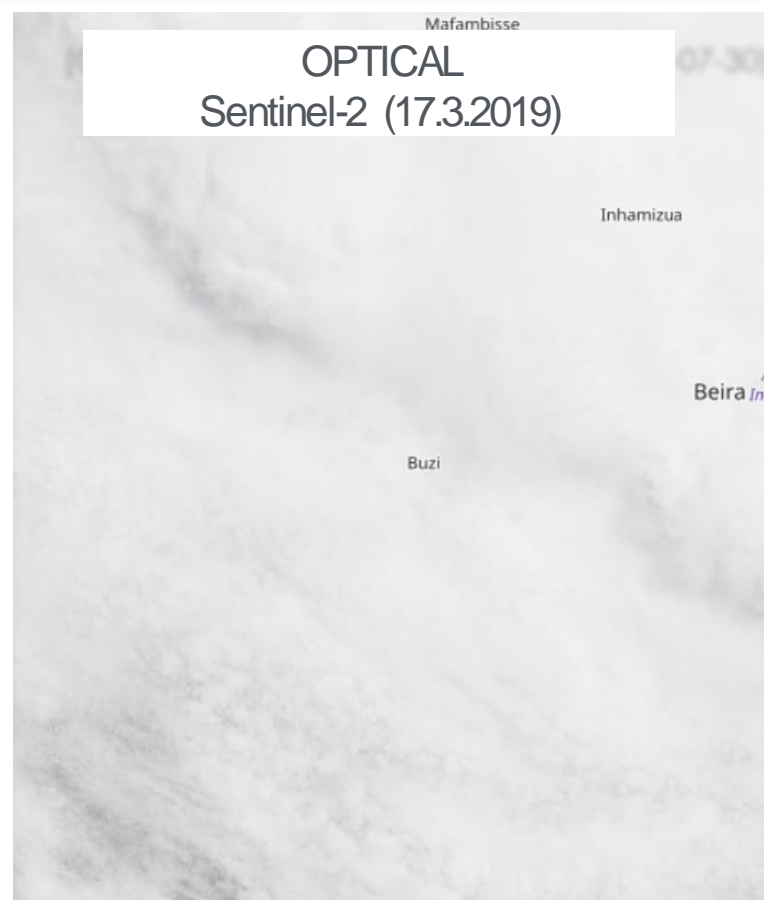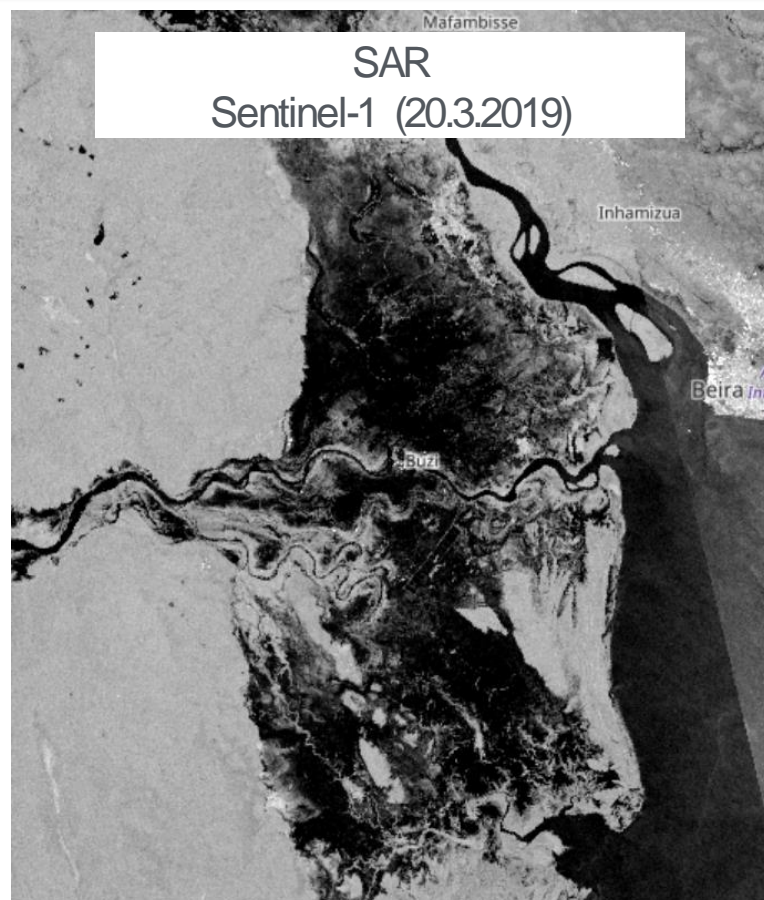


Floods in Beira, Mozambique

Radar Parameters to Consider for a Flood Mapping

Signal interaction

Analyzing the signal intensity from these various polarizations provides insights into the composition of the observed surface, as it relates to the following types of scattering:

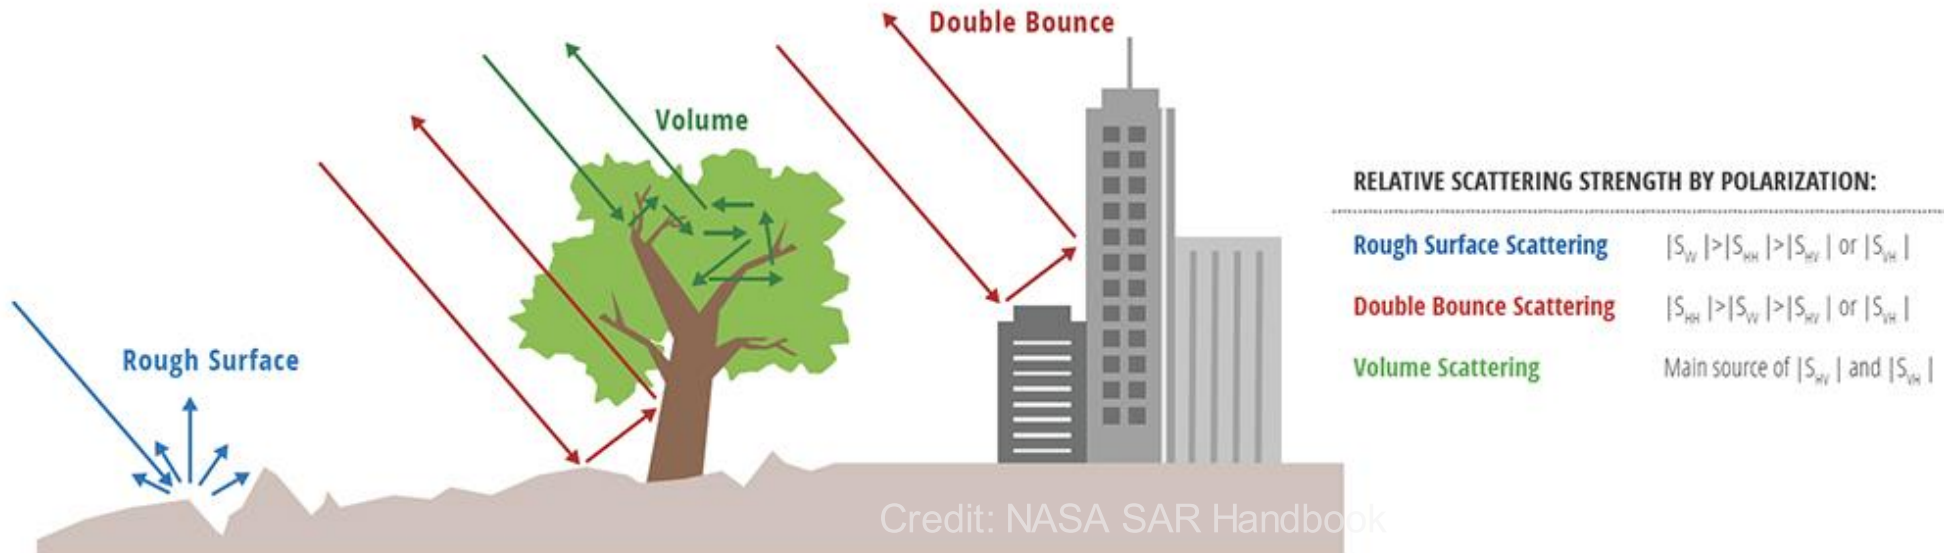

Rough surface scattering

- most sensitive to VV scattering
- caused f.e. by bare soil or water

Volume scattering

- most sensitive to cross-polarized data like VH or HV
- scattering by the leaves and branches


Double bounce

- most sensitive to an HH polarized signal
- caused by buildings, tree trunks, or inundated vegetation

Radar Parameters to Consider for a Flood Mapping


Signal interaction

- Calm water surfaces appear smooth, resulting in specular reflection and low backscatter in radar images
- In contrast, the surrounding land surface appears rougher, causing higher backscatter due to the scattering of radar waves by surface irregularities
- This difference in radar signatures allows for the mapping of water and other land surfaces

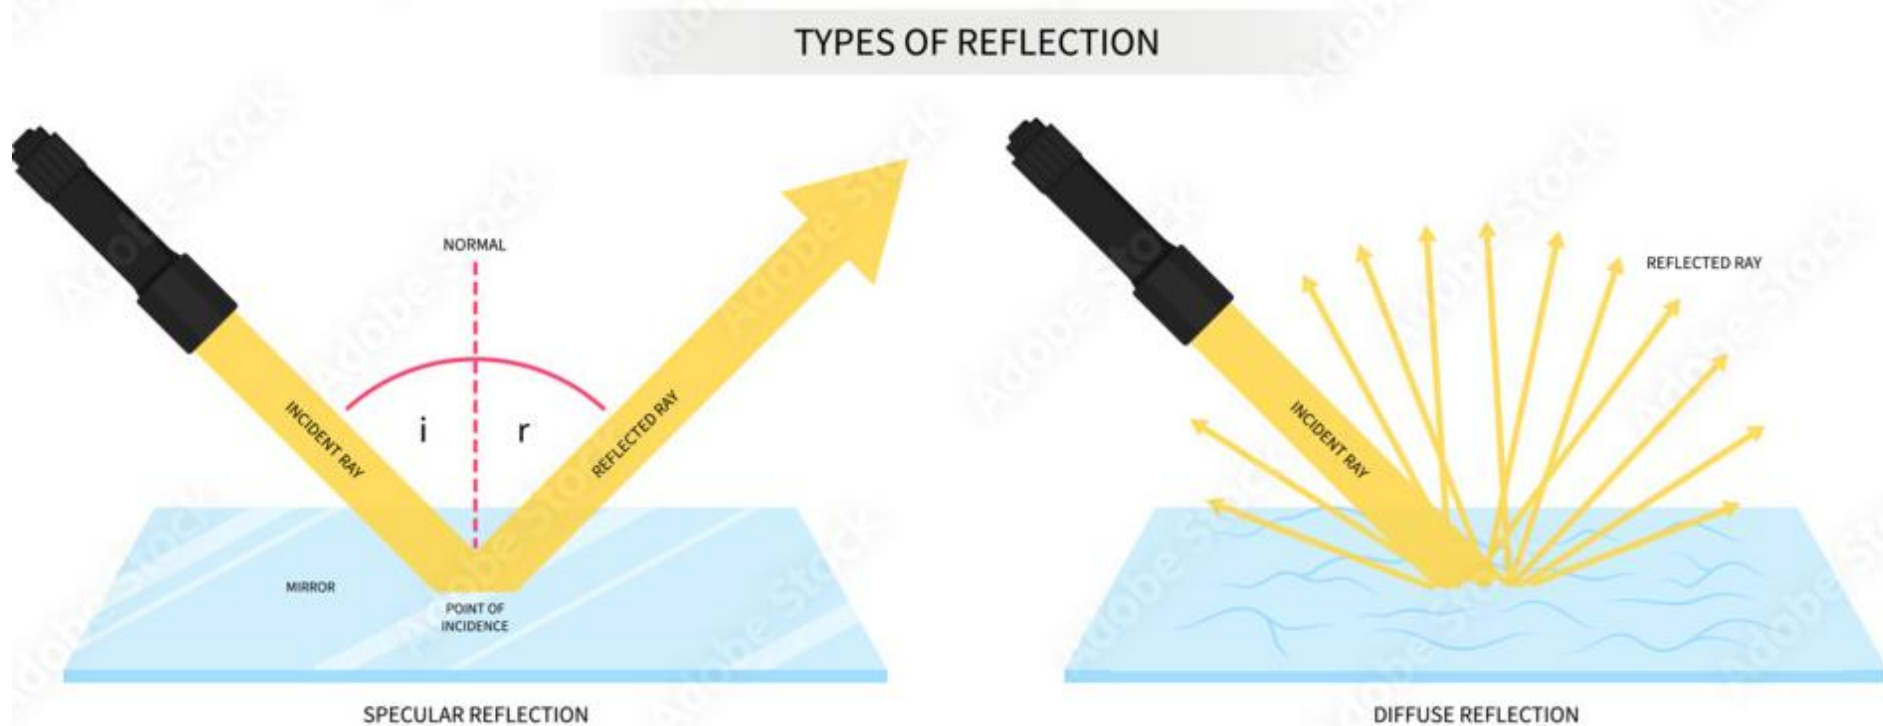

Radar Parameters to Consider for a Flood Mapping


Signal interaction

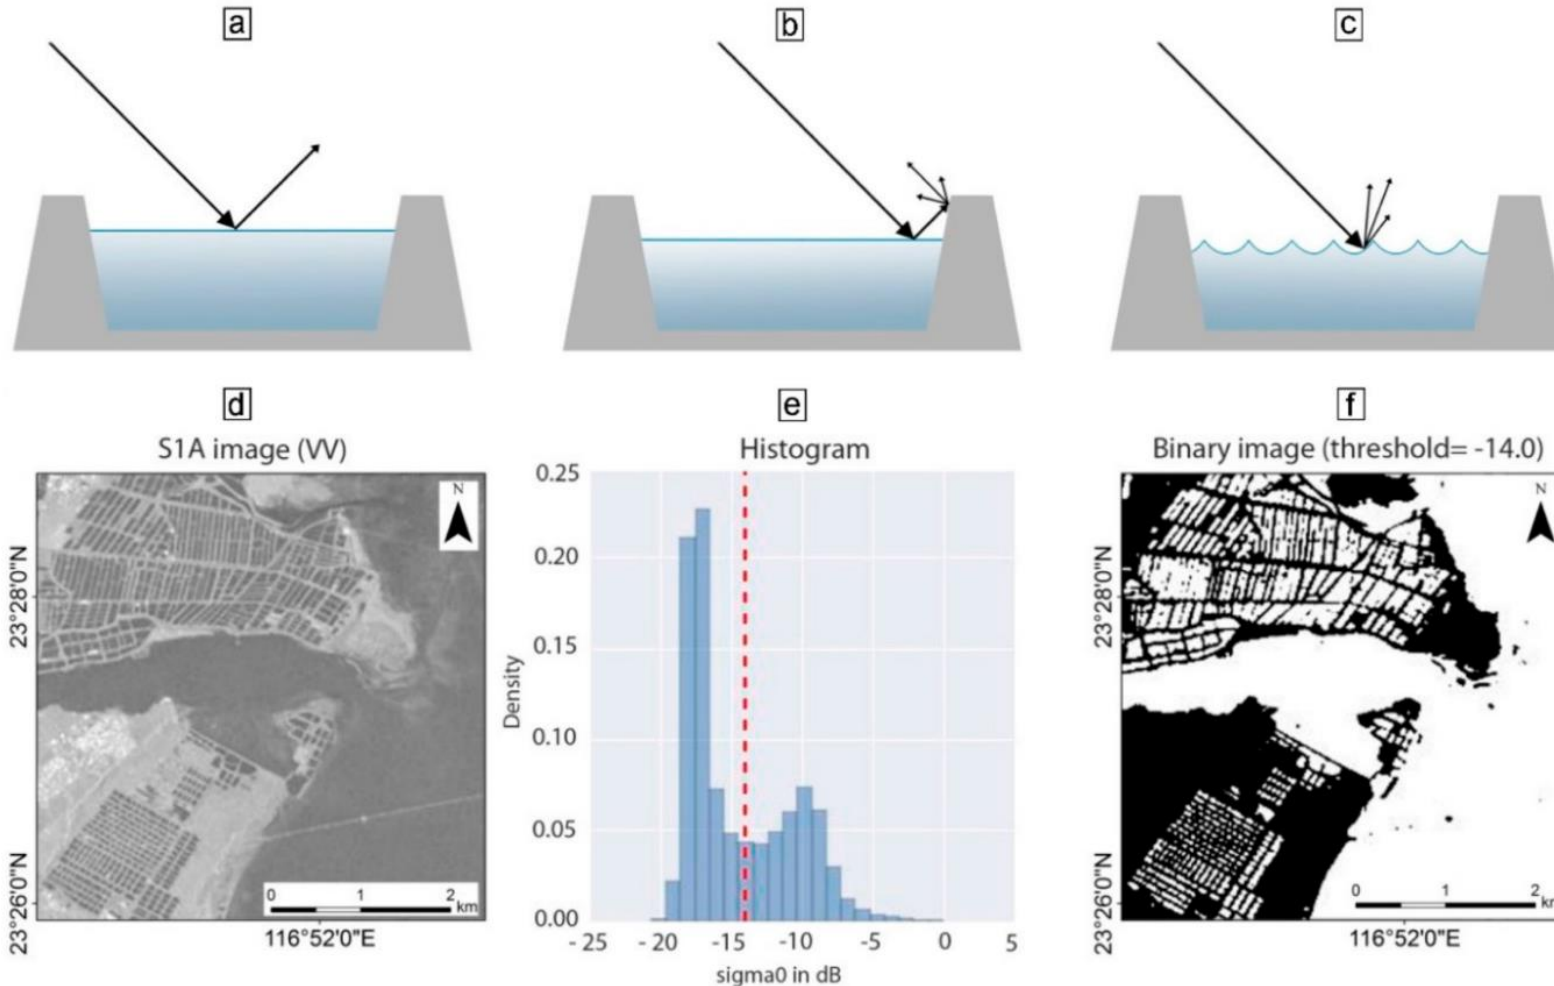


Examples of radar interaction with aquaculture ponds: (a) specular reflection (smooth water surface); (b) corner/embankment; and (c) diffuse reflection (rough water surface). (Bottom) S1A image (d); related histogram and classification threshold (e); and binary image of water and non-water after application of threshold (f). (Modified from Ottinger et al.

Source: <https://www.mdpi.com/2072-4292/11/17/1985>

Radar Parameters to Consider for a Flood Mapping

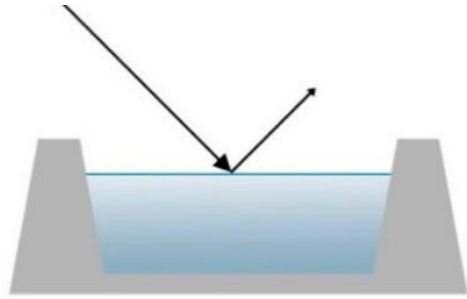

Smooth, Level Surface
(Open Water, Road)

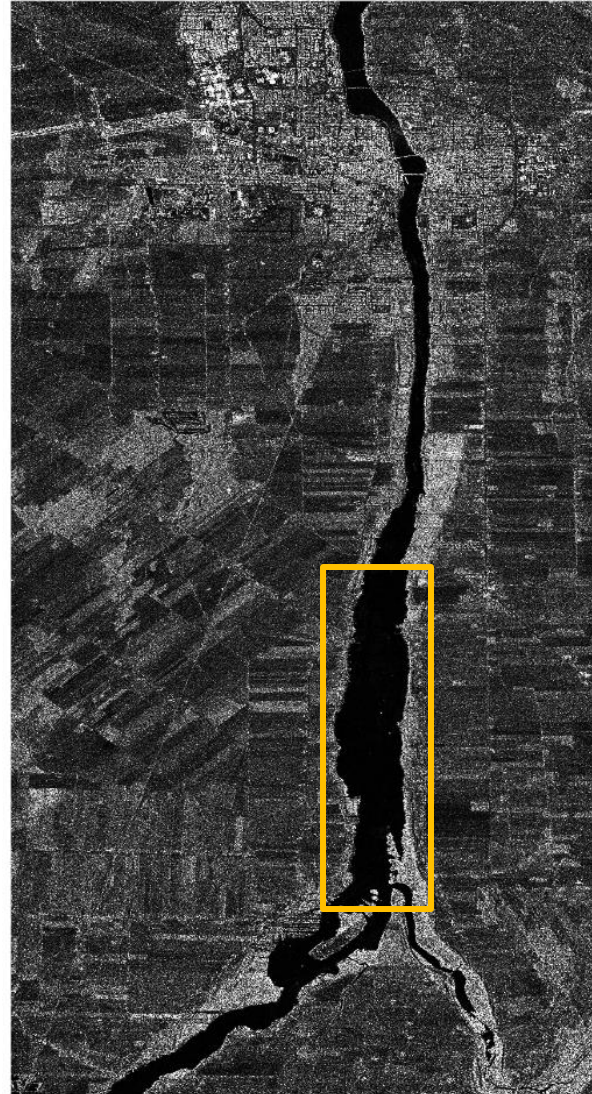


(a)



(b)

Radar Parameters to Consider for a Flood Mapping

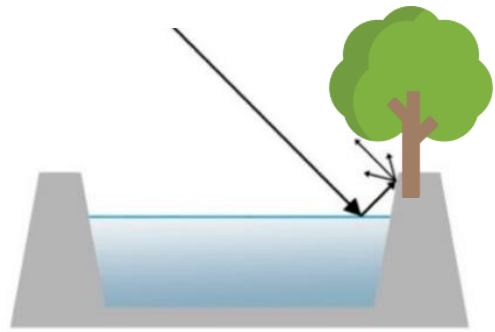

Inundated Vegetation



(a)



(b)


Radar Parameters to Consider for a Flood Mapping

Penetration through land covers as a Function of Wavelength and dielectric characteristics

- The penetration depth is depending on **wavelength** and **dielectric characteristics** of objects
- Penetration - predominant consideration when selecting a wavelength
- Typically, longer wavelengths result in greater penetration into the target

Flood Monitoring:


- X-band mostly scatters at the tops of trees
- C- and L-band signals penetrate increasingly
- Longer wavelength - better mapping of inundation under forest canopies

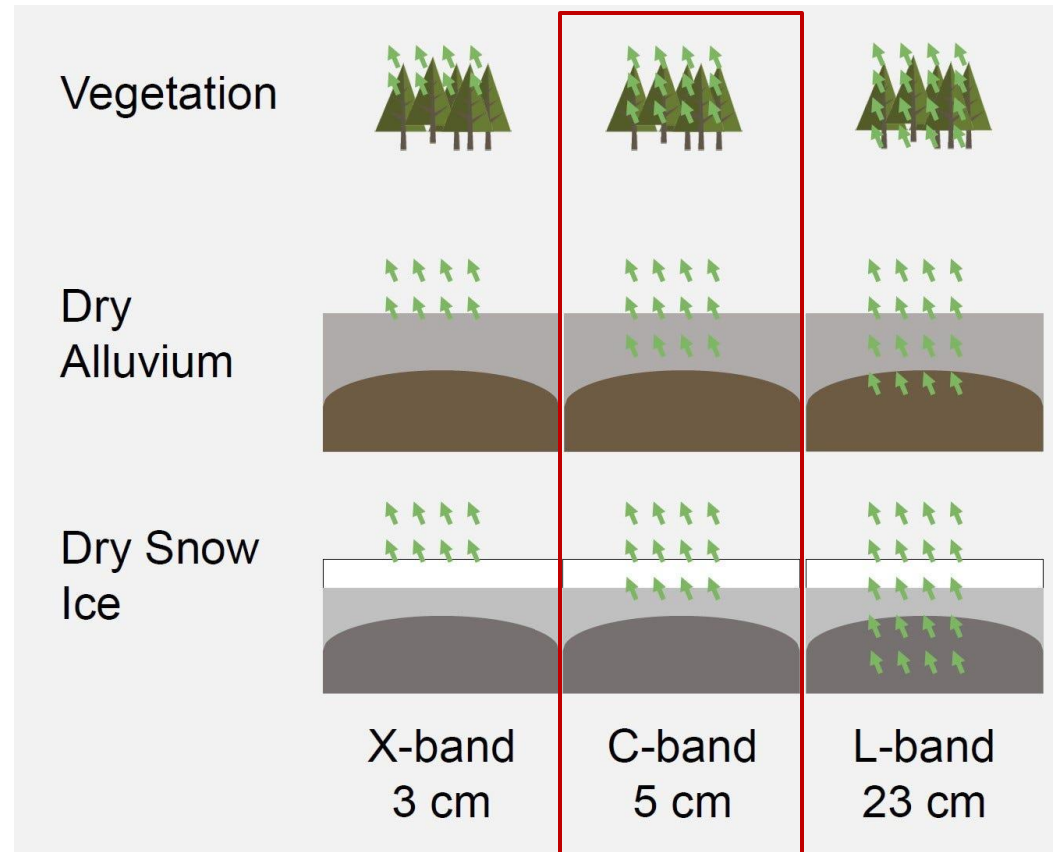

Source: <https://medium.com/@preet.balaji20/decoding-synthetic-aperture-radar-sar-remote-sensing-sar-series-part-1-getting-started-d3409eb3b2e3>

Radar Parameters to Consider for a Flood Mapping

Flooding under Vegetation Canopies

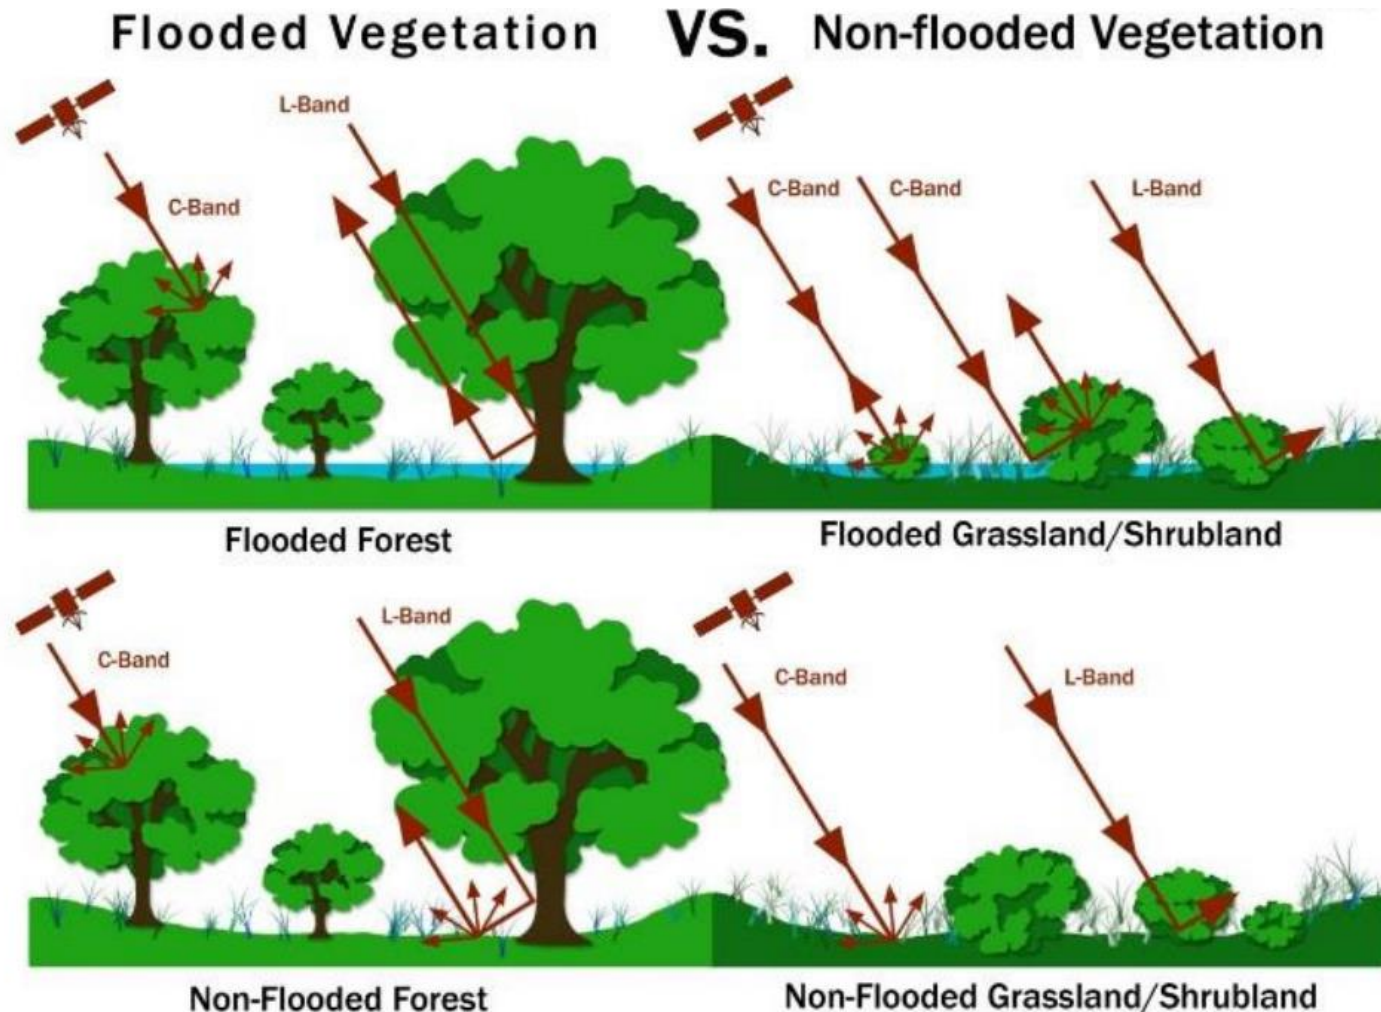

C-band:

~6cm, 4-8GHz


L-band:

~23cm, 1-2GHz

Enhanced return if tree cover underlain by water (double bounce effect – smooth water surface – vertical vegetation structures)

Radar Parameters to Consider for a Flood Mapping

Flooding under Vegetation Canopies

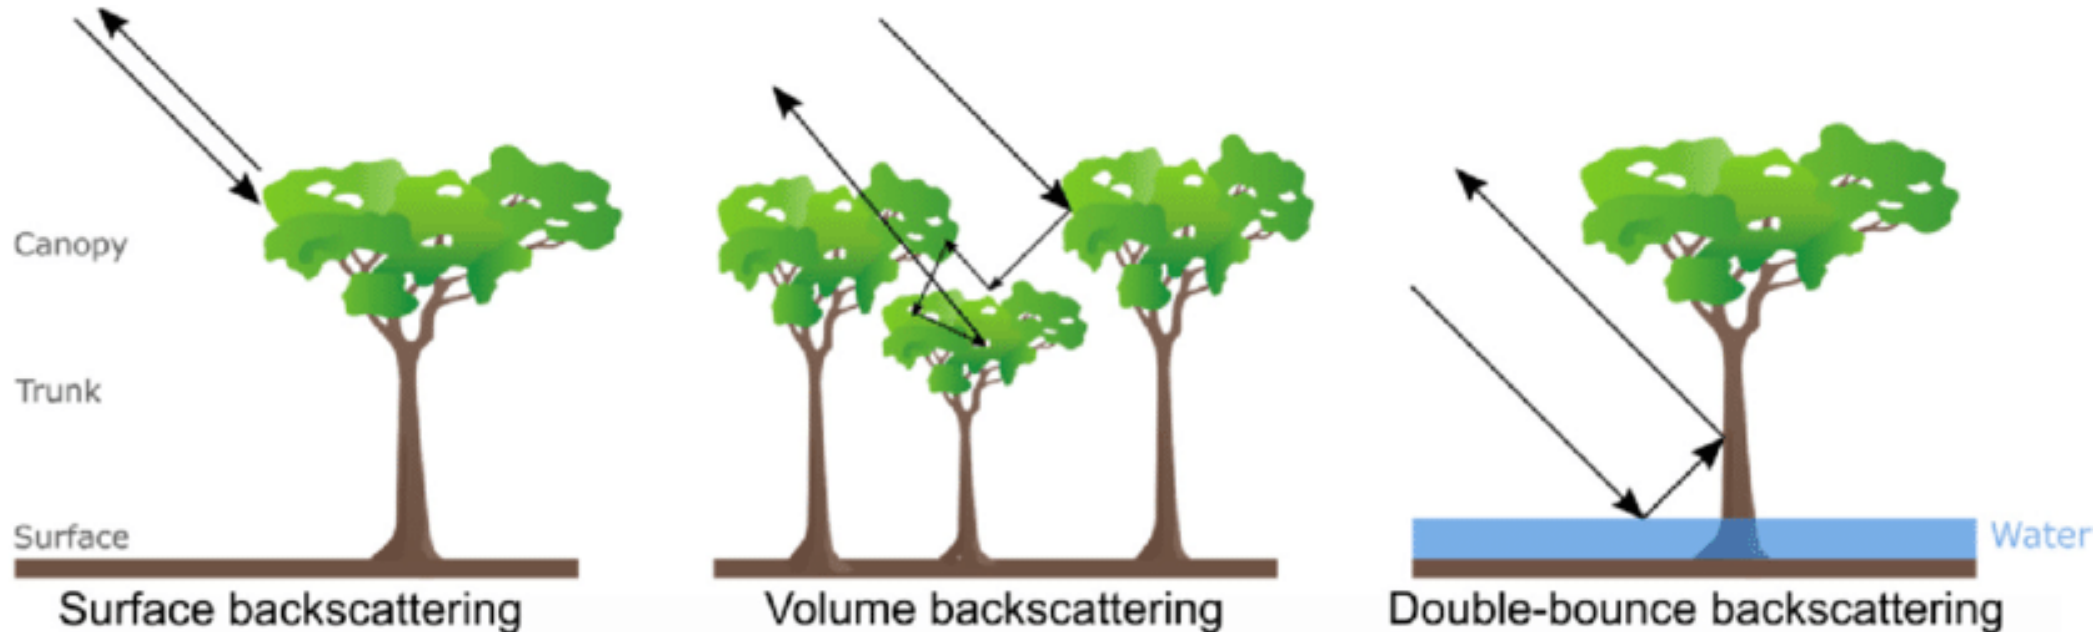

Nonflooded condition


- Signal scattering in the crown and on the ground

Flooded condition

- Submerged wetland/open water
- Strong double-bounce reflection between the tree trunks and the water surface

Radar Parameters to Consider for a Flood Mapping

Innundation in Crops and Meadows

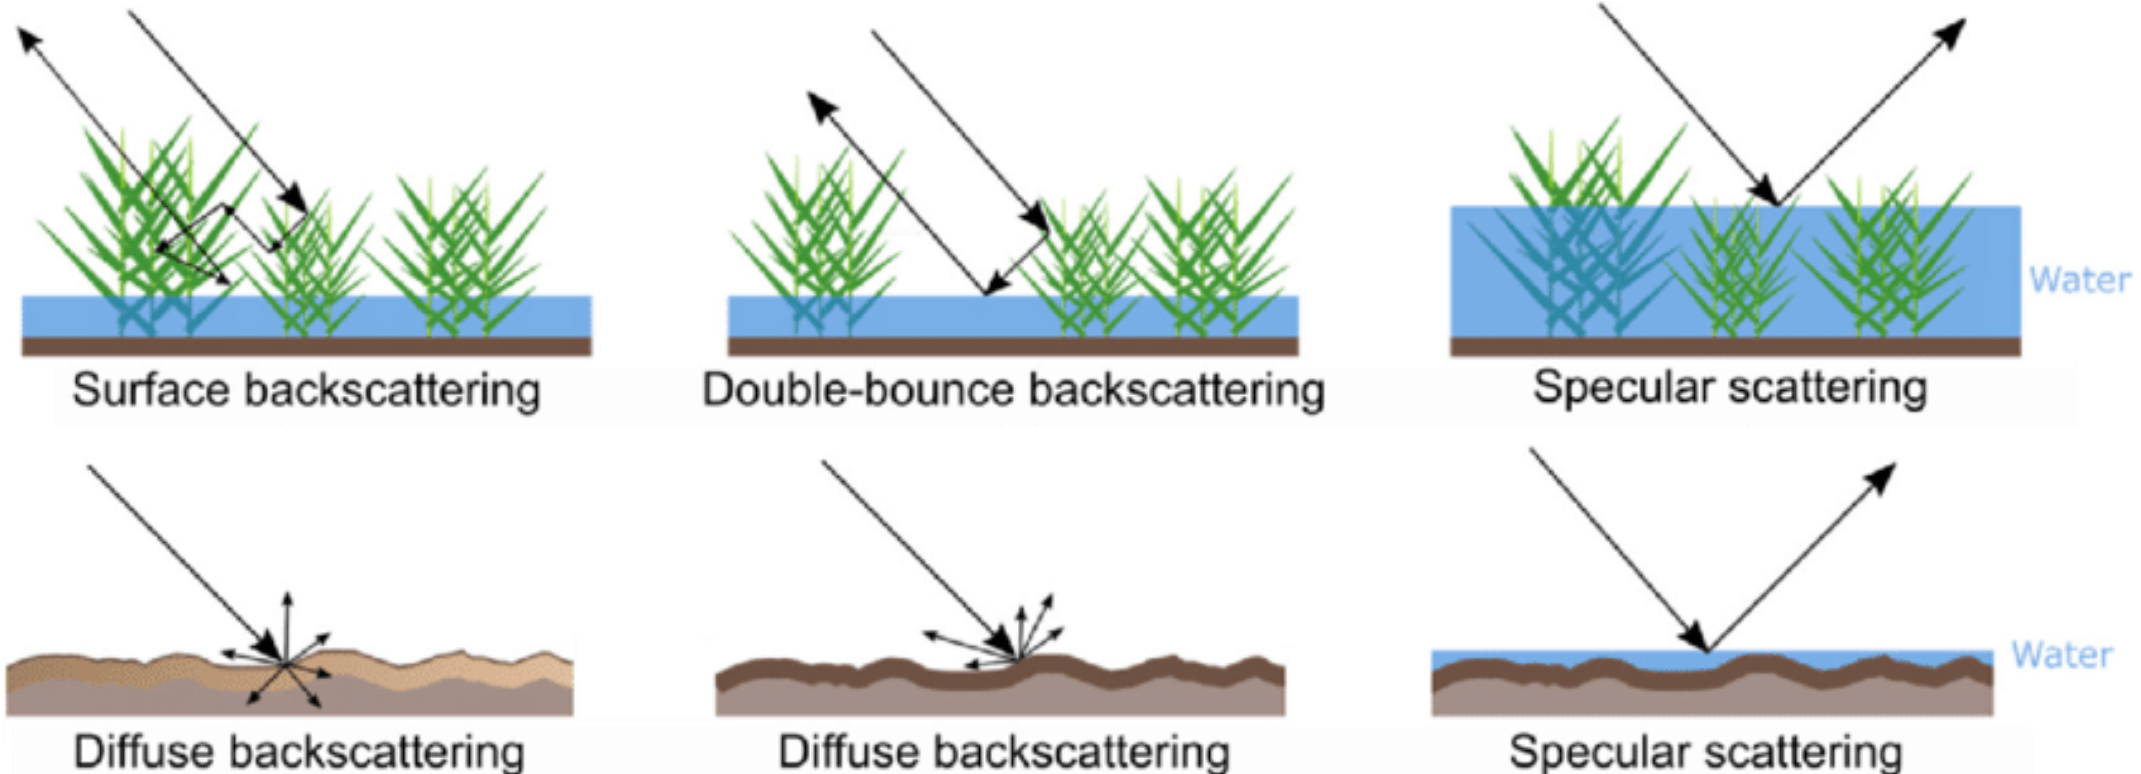


- Backscatter increases with soil moisture
- With increasing water level, backscatter becomes weaker with more specular reflection (scattering away from the sensor)

Optical Parameters to Consider for a Postfloods/Flood Mapping

Physical basis for Water bodies mapping

- Water absorbs the longer wavelengths of visible and NIR and SWIR domains
- Reflects the shorter wavelengths of the visible domain (blue, green)
- Water color depends on: depth, materials in suspension, vegetation

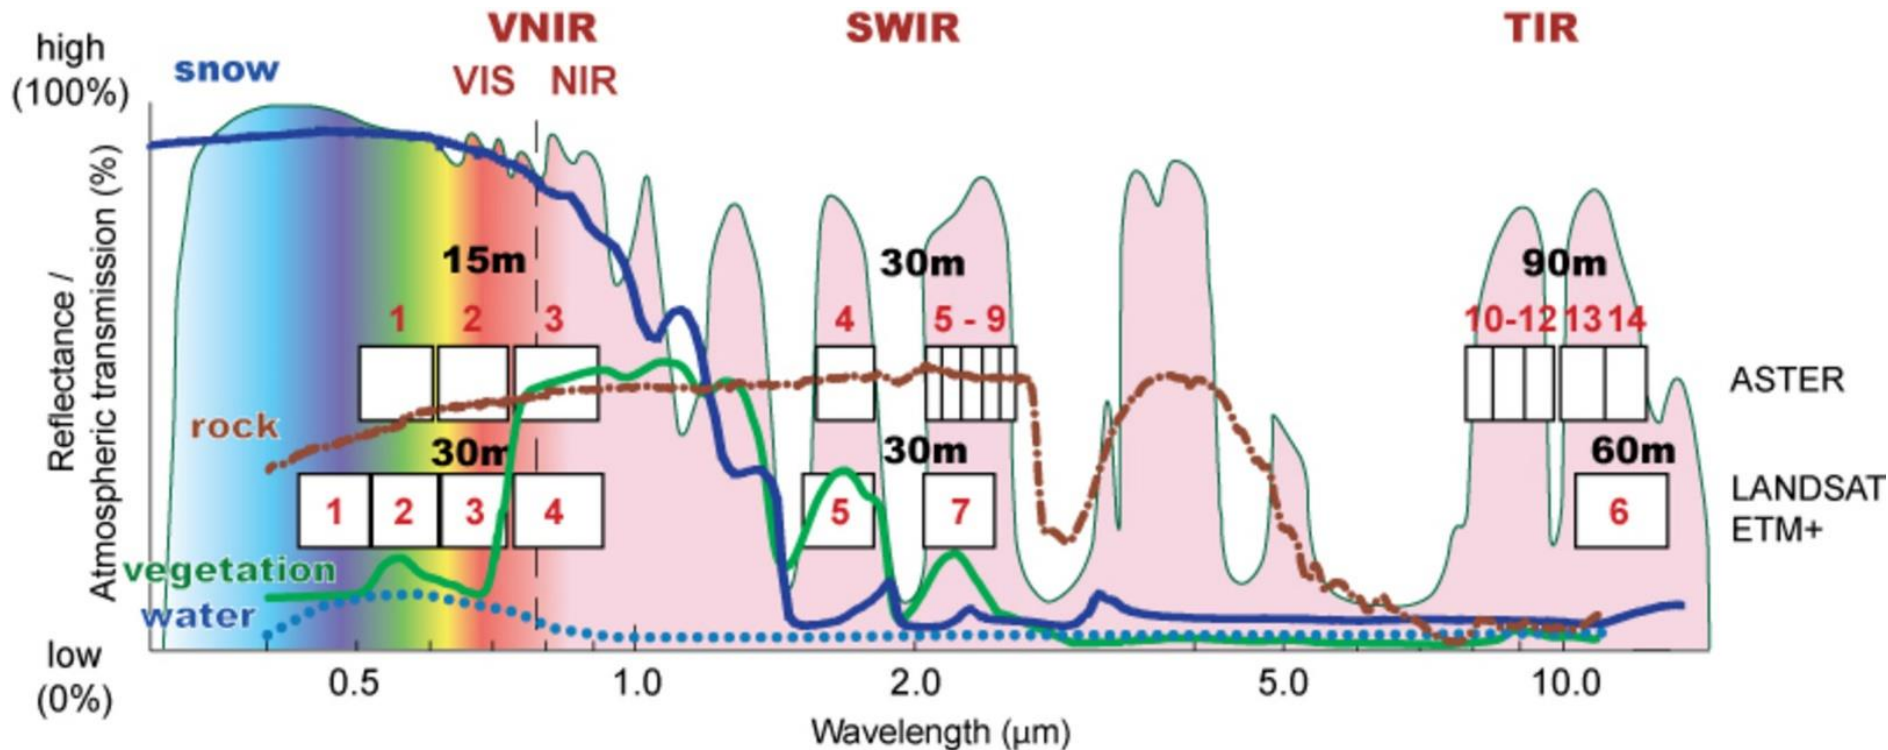

https://www.esa.int/ESA_Multimedia/Images/2011/11/Reflectance_curves_of_snow_vegetation_water_and_rock

Optical Parameters to Consider for a Postfloods/Flood Mapping

Indices for floods/postfloods mapping

Index	Equation	Remark
Normalized Difference Water Index	$NDWI = (Green - NIR) / (Green + NIR)$	Water has positive value
Normalized Difference Moisture Index	$NDMI = (NIR - MIR) / (NIR + MIR)$	Water has positive value
Modified Normalized Difference Water Index	$MNDWI = (Green - MIR) / (Green + MIR)$	Water has positive value
Water Ratio Index	$WRI = (Green + Red) / (NIR + MIR)$	Value of water body is greater than 1
Normalized Difference Vegetation Index	$NDVI = (NIR - Red) / (NIR + Red)$	Water has negative value
Automated Water Extraction Index	$AWEI = 4 \times (Green - MIR) - (0.25 \times NIR + 2.75 \times SWIR)$	Water has positive value


Earth Observation Applications for Post-Flood Recovery

- Satellite imagery and data products have played a crucial role in addressing the floods along, facilitating effective response efforts
- The varied spatial, temporal, and spectral resolution of Earth observation (EO) data enables numerous applications for flood recovery
- Key areas where EO can aid in flood recovery efforts:
 - mapping flood extent
 - monitoring impacts
 - reducing flood risk
 - evaluating flood-related adaptation programs

Source: <https://ourworldindata.org/natural-disasters#extreme-precipitation-and-flooding>

Global deaths from disasters over more than a century

The size of the bubble represents the estimated annual death toll. The largest years are labeled with this total figure, alongside large-scale events that contributed to the majority – although usually not all – of these deaths.

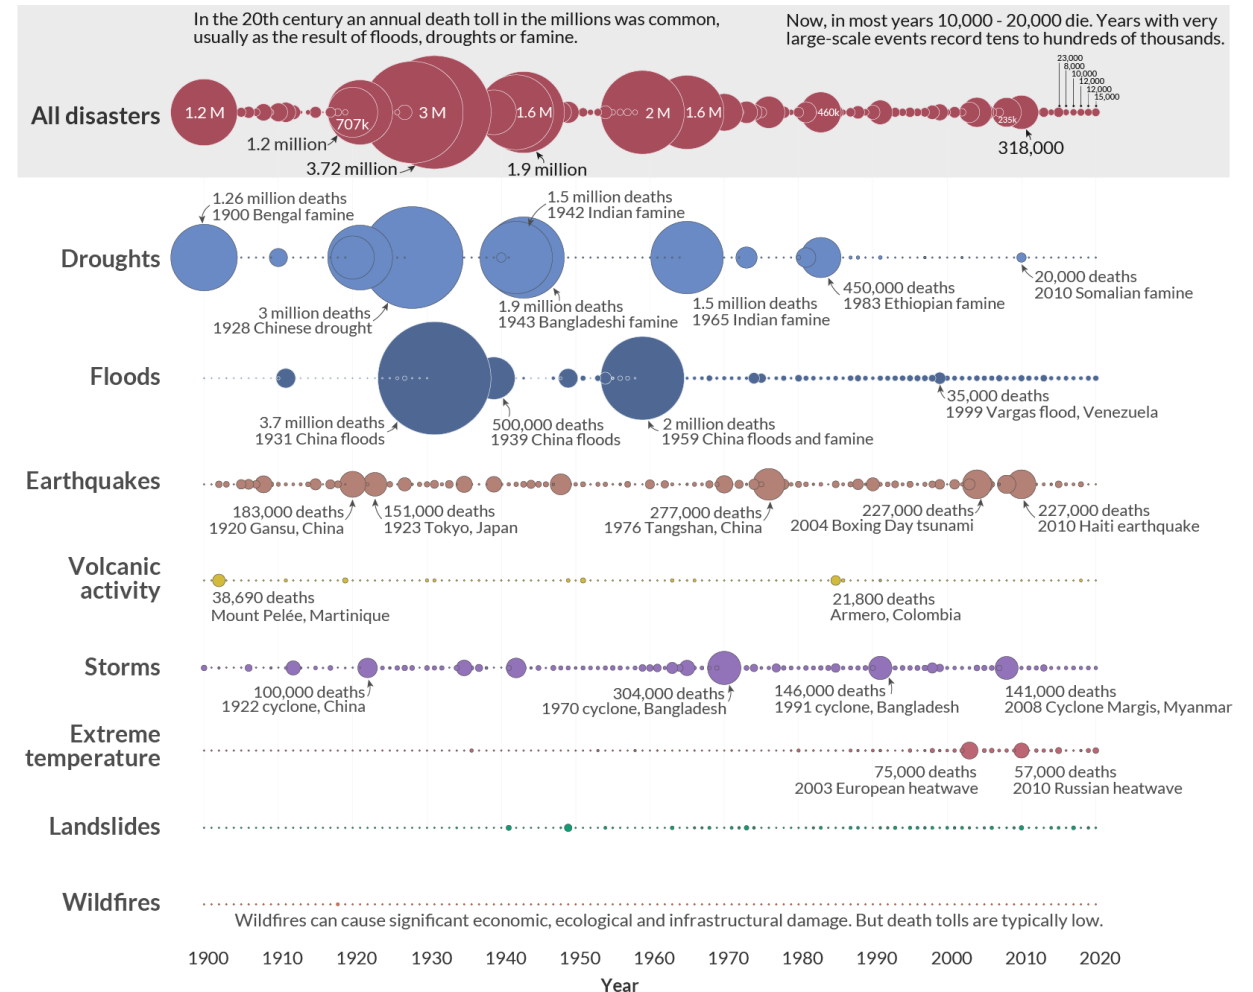


Data source: EM-DAT, CRED / UCLouvain, Brussels, Belgium – www.emdat.be (D. Guha-Sapir).
OurWorldinData.org – Research and data to make progress against the world's largest problems.

Licensed under CC-BY by the author Hannah Ritchie.

Earth Observation Applications for Post-Flood Recovery


Monitoring impacts

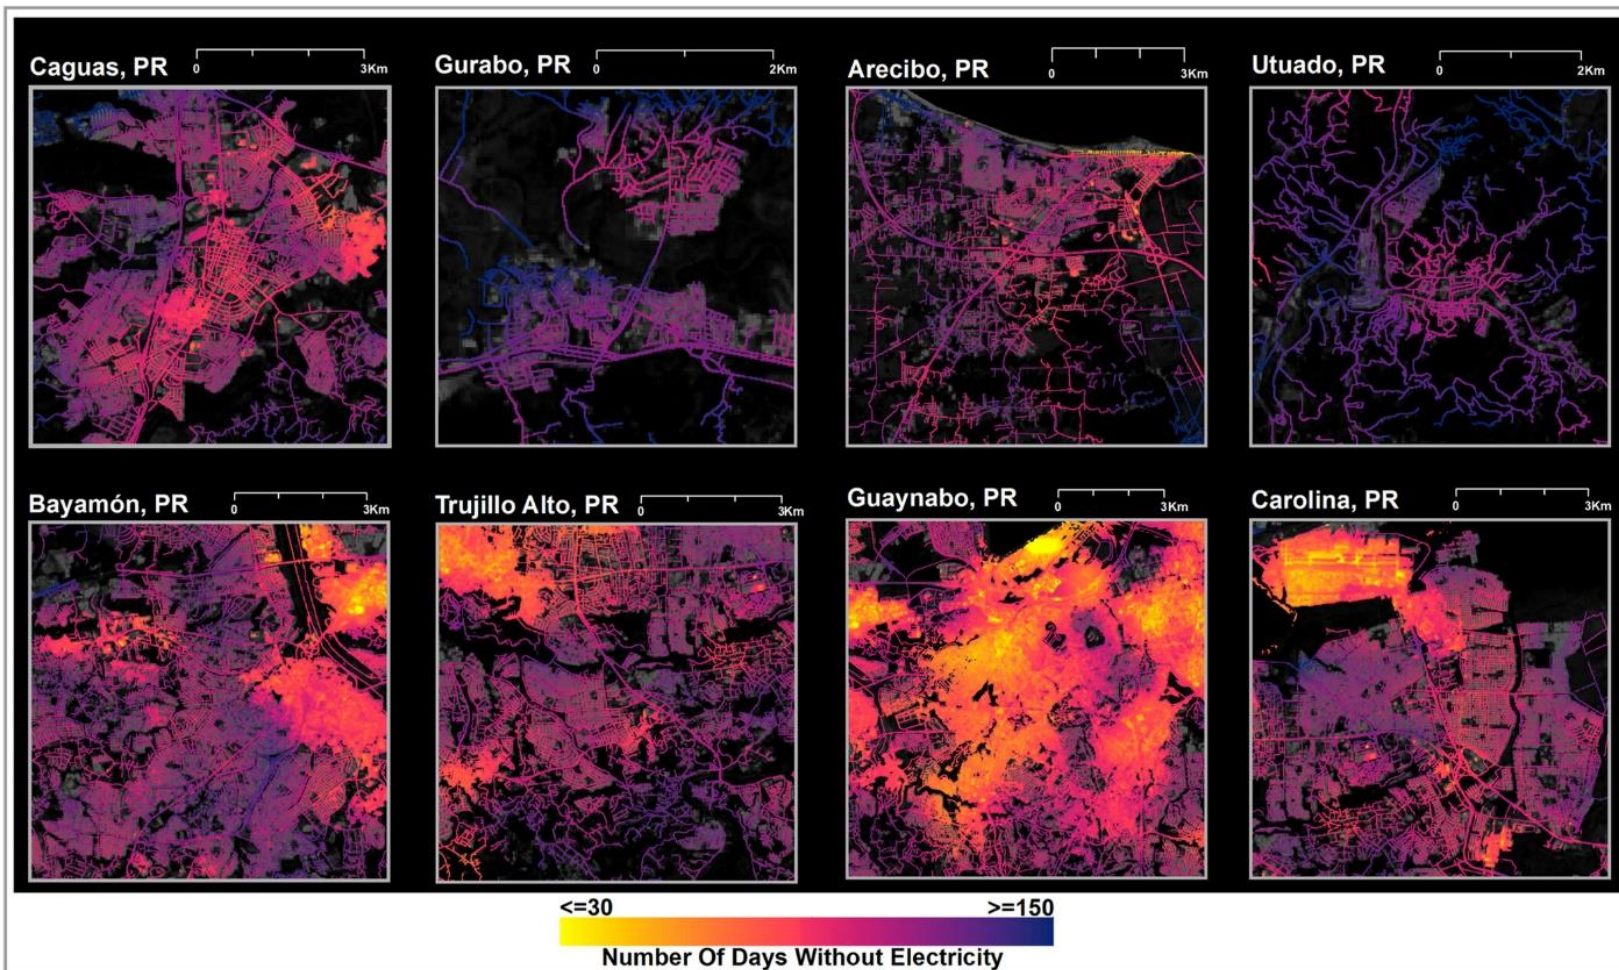

- Variation in electricity outages for different locations in Puerto Rico following Hurricane Maria based on time series of NASA Black Marble nighttime light imagery. Image from Román et al. (2019).
- <https://agupubs.onlinelibrary.wiley.com/doi/full/10.1029/2023EF003606>

Earth Observation Applications for Post-Flood Recovery

Flood Risk Reduction

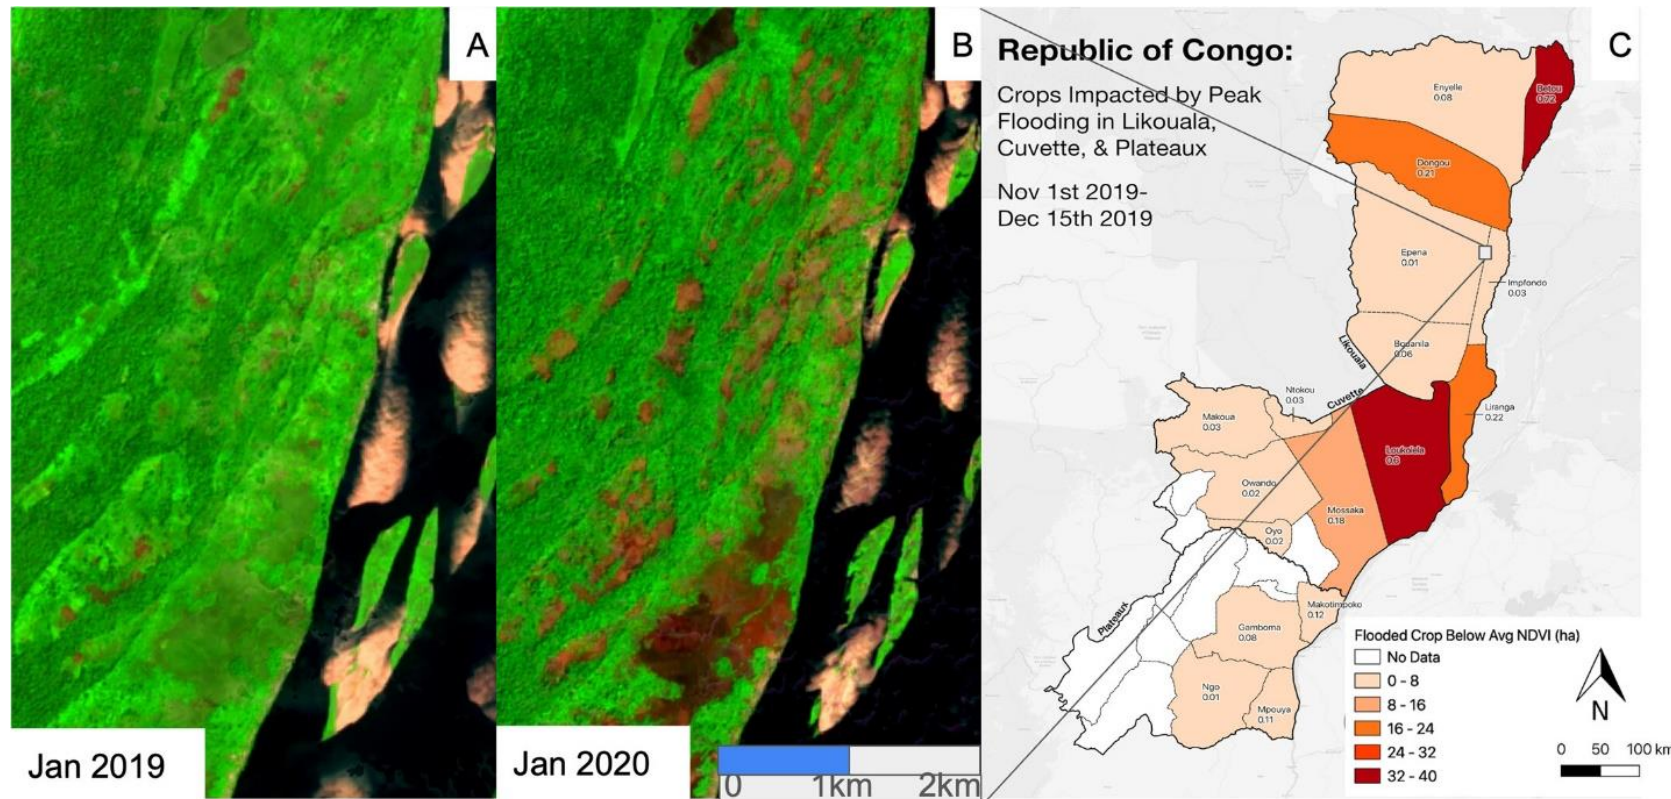

- An example of Earth Observation to provide flood recovery decision support. Series of Sentinel-2 imagery in a flood-affected area before the December 2019 flood in January 2019 (a) and after in January 2020 (b) in the Republic of Congo


<https://agupubs.onlinelibrary.wiley.com/doi/full/10.1029/2023EF003606>

Improving flood forecasting with Earth observation data

Hydrological models to improve flood forecasting

- River discharge is a variable that is not typically easy to measure from satellites. However, new models using a combination of optical data from MODIS, to estimate river velocity, and radar altimetry measurements, to assess river levels rising – the same way scientists monitor sea levels rising
- Developing new models and leveraging cutting-edge sensor technology is crucial, especially with the deployment of new satellite constellations


<https://skywatch.com/improving-flood-forecasting-with-earth-observation-data/>

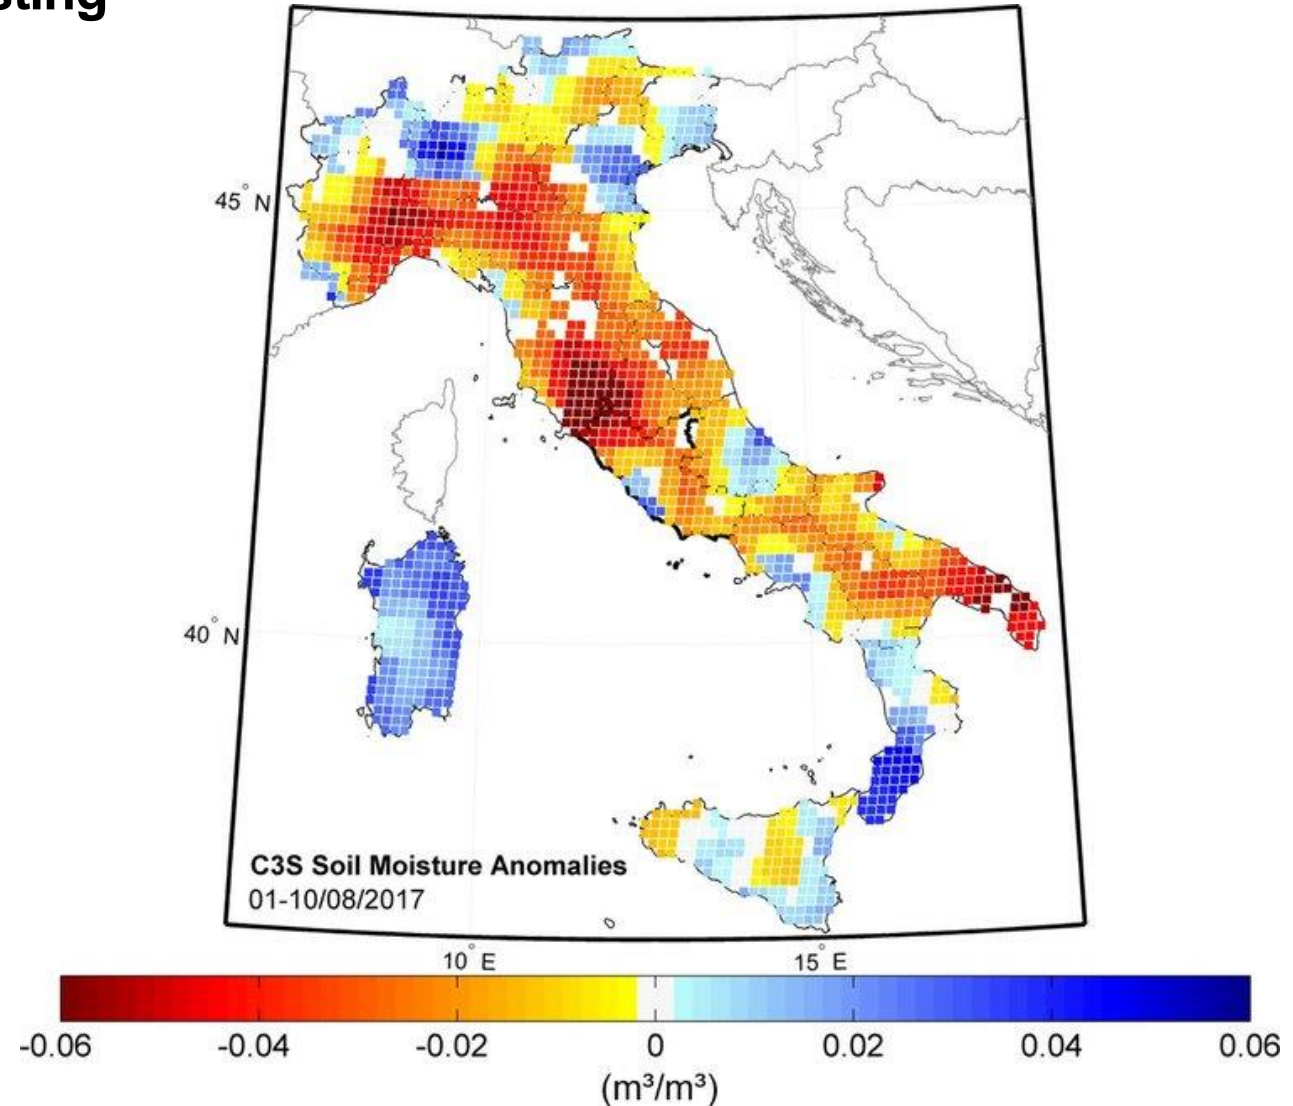

Improving flood forecasting with Earth observation data

A Framework to Guide EO Monitoring of Flood Recovery

- Framework to guide Earth Observation monitoring flood recovery and redress inequitable post-flood recovery outcomes

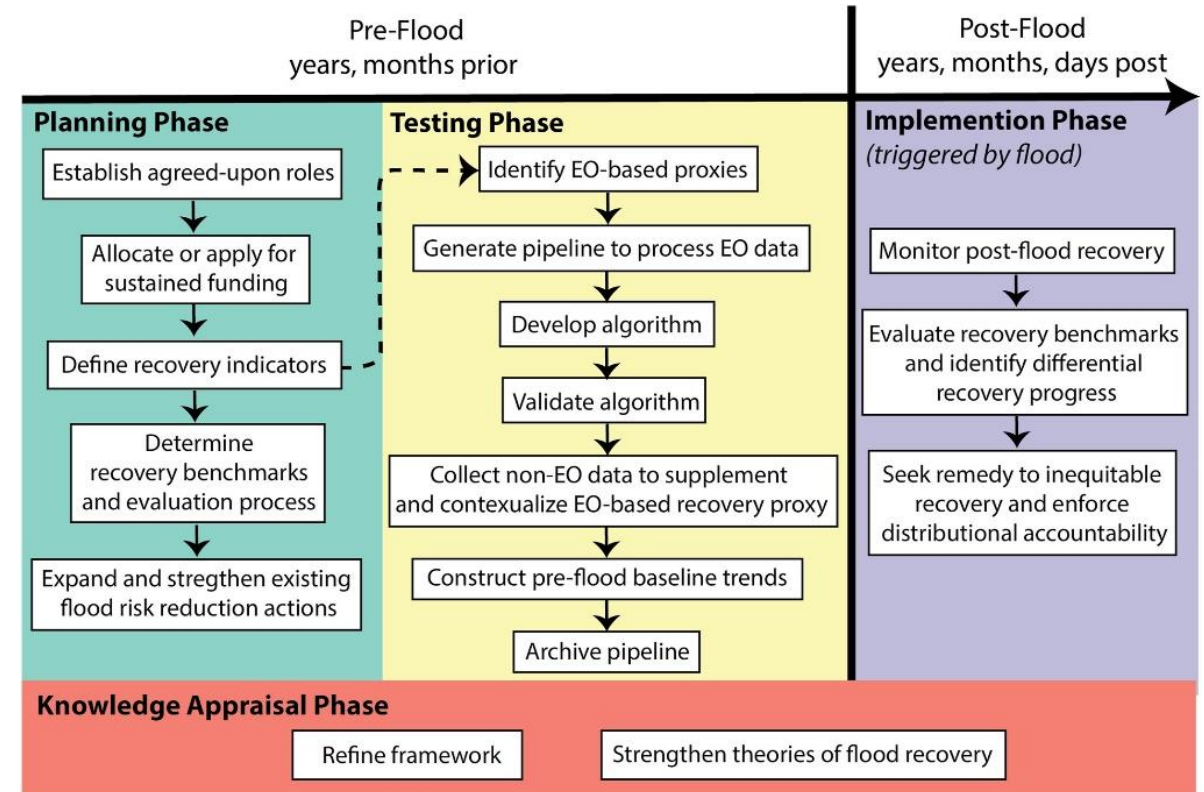

<https://skywatch.com/improving-flood-forecasting-with-earth-observation-data/>

Improving flood forecasting with Earth observation data

Operational Entities Monitoring Post-Flood Recovery

- EO can bolster effective disaster risk management, as demonstrated by established protocols that integrate EO into disaster response and recovery
- Notably, initiatives like the Committee on Earth Observations Satellites (CEOS) Recovery Observatory and Copernicus Emergency Management Service (CEMS) Risk and Recovery Mapping offer recovery mapping services.



The screenshot shows the Copernicus Emergency Management Service (CEMS) Mapping page. At the top, there is a header with the European Commission logo, the Copernicus logo, and the text "COPERNICUS Emergency Management Service - Mapping". Below the header, there is a navigation bar with links: "Home", "What is Copernicus?", "What is CEMS - Mapping?", "Link to Early Warning Systems", and "News". The main content area is titled "The Emergency Management Service - Mapping" and includes a description of the service: "The Copernicus Emergency Management Service (CEMS) uses satellite imagery and other geospatial data to provide free of charge mapping service in cases of natural disasters, human-made emergency situations and humanitarian crises throughout the world. It covers in particular:" followed by a list of disaster types: Floods, Earthquakes, Landslides, Severe Storms, Fires, Technological disasters, Volcanic eruptions, Humanitarian crises, and Tsunamis. On the left side, there is a sidebar with a list of links under the heading "EMS - MAPPING": "Who can use the service", "How to use the service", "Portfolio: Rapid Mapping", "Portfolio: Risk and Recovery", "Quality control", and "User Guide". Below this, there is a section for "RAPID MAPPING" with links: "List of Activations" and "Online Manual".

European Commission

COPERNICUS

Emergency Management Service - Mapping

Copernicus EMS » Mapping » The Emergency Management Service - Mapping

Home | What is Copernicus? | What is CEMS - Mapping? | Link to Early Warning Systems | News

LATEST NEWS • 2023-08-24 | [EMSN166] Post-wildfire damage assessment in East Macedonia, Greece

EMS - MAPPING

- Who can use the service
- How to use the service
- Portfolio: Rapid Mapping
- Portfolio: Risk and Recovery
- Quality control
- User Guide

RAPID MAPPING

- List of Activations
- Online Manual

The Emergency Management Service - Mapping


The Copernicus Emergency Management Service (CEMS) uses satellite imagery and other geospatial data to provide free of charge mapping service in cases of natural disasters, human-made emergency situations and humanitarian crises throughout the world. It covers in particular:

- Floods
- Earthquakes
- Landslides
- Severe Storms
- Fires
- Technological disasters
- Volcanic eruptions
- Humanitarian crises
- Tsunamis


<https://emergency.copernicus.eu/>

Improving flood forecasting with Earth observation data

Improve understanding of disaster risks and costs to society

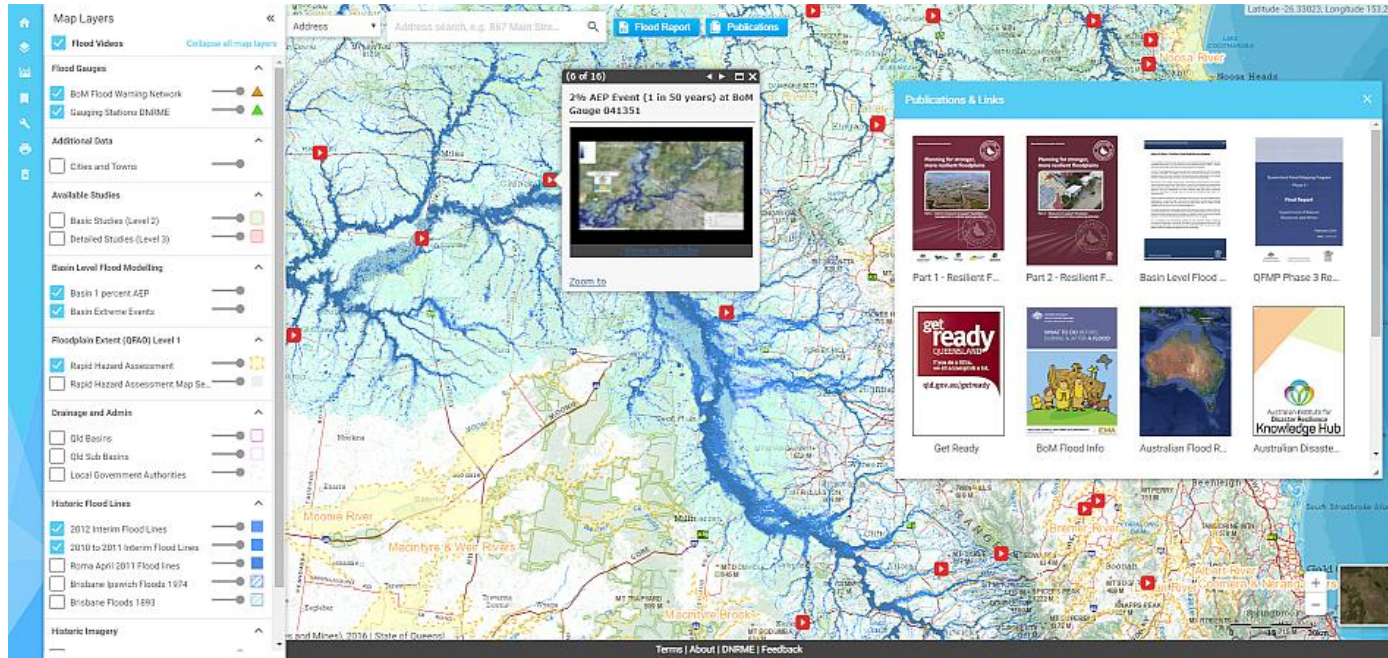

FloodCheck is an online tool developed by Geoscience Australia, providing access to flood mapping and related information for Australia. It offers interactive maps and datasets to help users understand flood risks, monitor flood events, and support decision-making related to flood preparedness and response. FloodCheck integrates various data sources, including satellite imagery, rainfall data, and topographic information, to provide comprehensive flood information to the public, emergency responders, and policymakers.

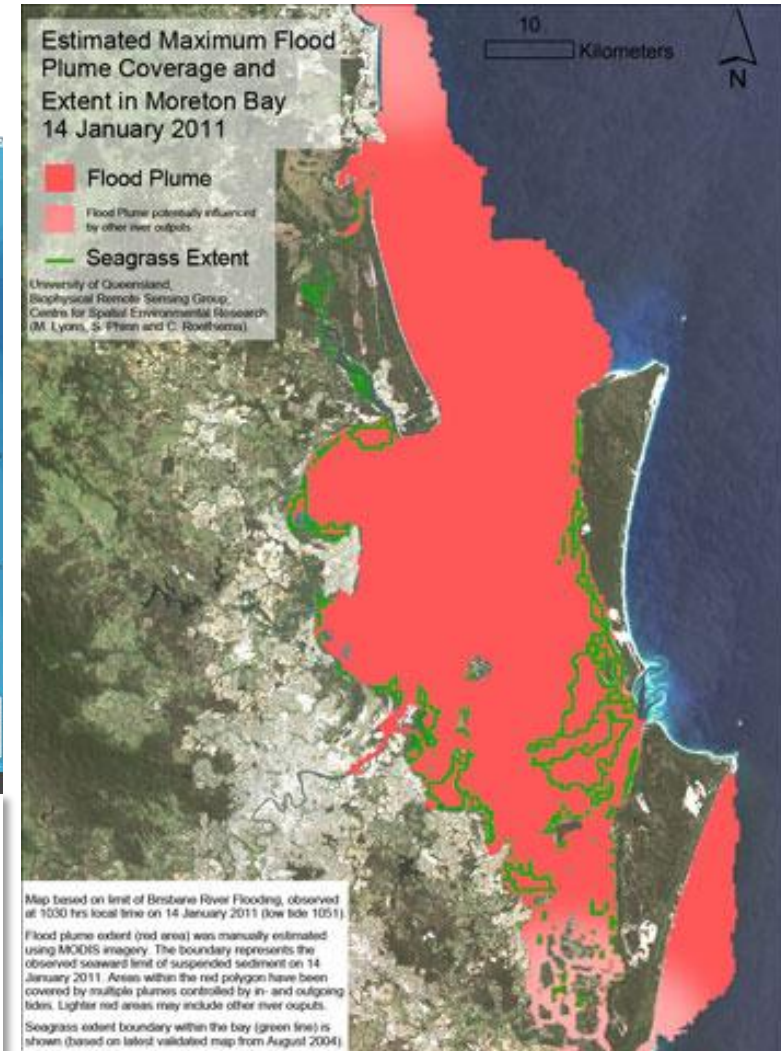


A visualisation of the flood plume in Moreton Bay. Courtesy Mitchell Lyons

Improving flood forecasting with Earth observation data

Improve understanding of disaster risks and costs to society

- Access to reliable and openly accessible data regarding disaster risks, expenses, impacts, and public investments in recovery and resilience is crucial for enhancing awareness and planning
- While there have been notable advancements in data quality for certain hazards, such as state-wide flood mapping, limitations persist in terms of data availability, consistency, and usability across various natural disaster risks

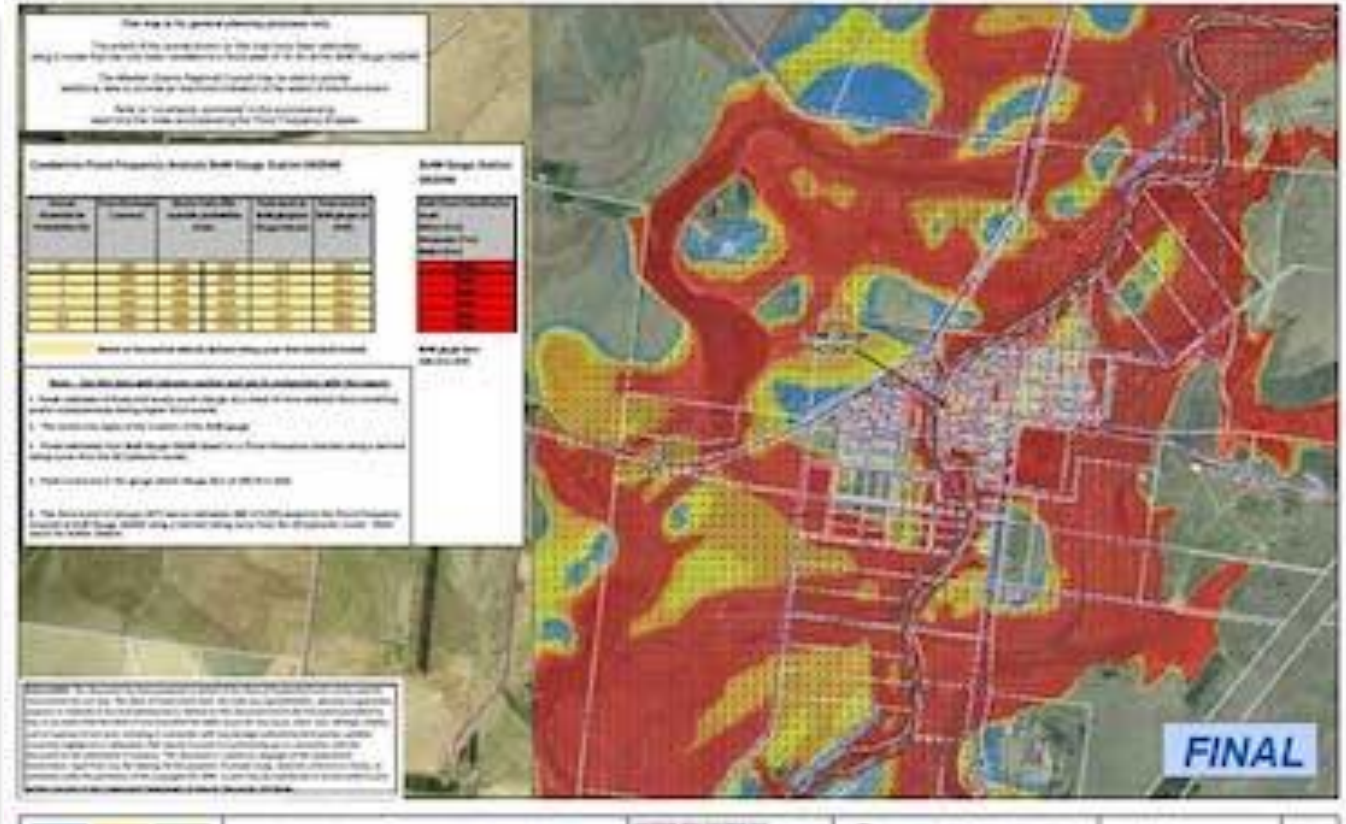

<https://www.watertech.com.au/projects/flood-risk-mapping-queensland/>

For more information, see the tutorials:

[10. Flood Monitoring with Sentinel-1 & Sentinel-2 using the SNAP software](#)

[11. Flood Monitoring with Sentinel-1, Sentinel-2 data using the SNAP software](#)

Thank you for the attention