



## EXERCISE 4 – TUTORIAL

---

Forestry with Sentinel-1: Single Image Analysis and Time Series to detect forest change using SNAP software

# 1 | Exercise outline

In this exercise, we will:

- Generate Radiometrically Terrain Corrected (RTC) Images from Sentinel-1 GRD products to monitor forest extent, structure and biomass
- Perform statistical analyses using Scatterplots, Histogram Analysis, Profile Plot etc.
- Process SAR data with SNAP using single-date and multi-temporal processing and generate time series analysis of multi-temp dataset
- Emphasize the critical role of SAR in sustainable resource management and forest conservation




## 2 | Background

### Forestry Mapping with Sentinel-1 data

Sentinel-1 synthetic aperture radar (SAR) data presents a versatile tool for comprehensive forestry mapping and monitoring. By analyzing SAR images acquired at different times, changes in forest cover can be effectively detected, providing insights into deforestation, reforestation, and forest degradation.

Sentinel-1 has a significant potential in sustainable forest management through its ability to detect clear-cut and partial-cut areas, classify forest types, estimate biomass, and identify disturbances. Regarding climate change mitigation, the mapping of forest fire scars using Sentinel-1 data is crucial for understanding a forest's carbon history and accurately estimating carbon emissions.


Additionally, SAR data allows for the classification of various forest cover types, aiding in forest management and conservation efforts. Furthermore, SAR data offers valuable information for assessing habitat quality and carbon stocks.

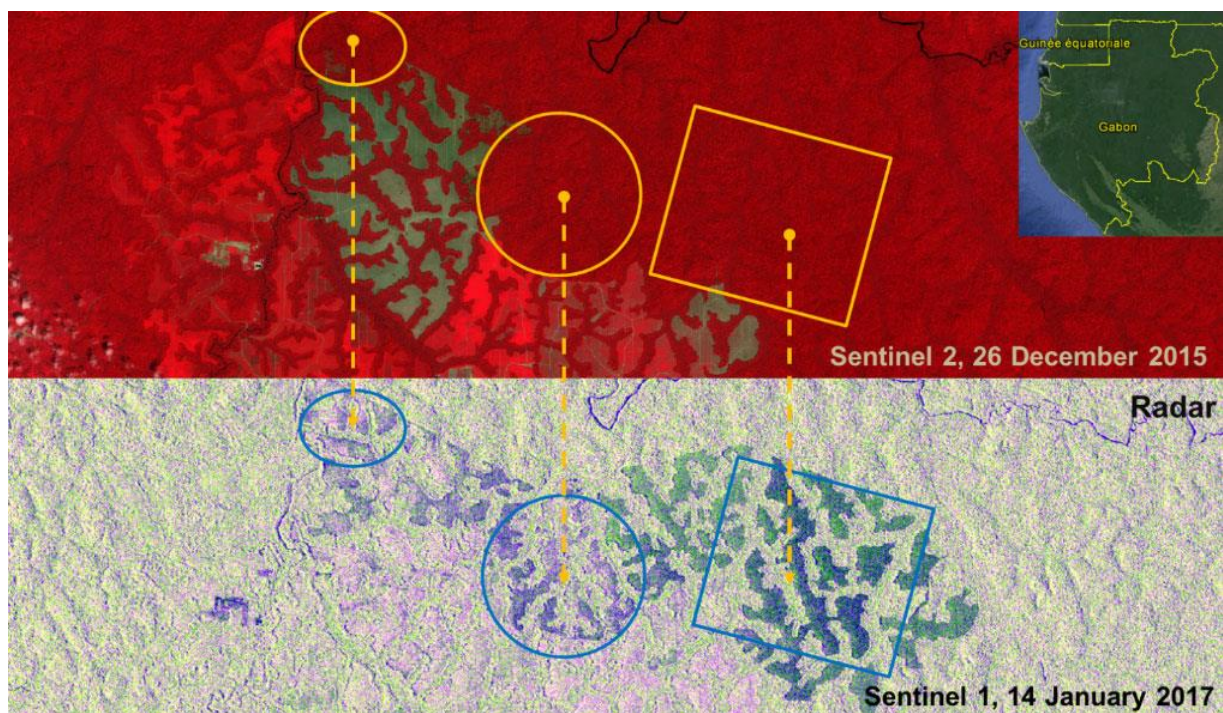

Source: <https://sentinels.copernicus.eu/documents/247904/3428726/Sentinel-1-2-rubber-plantation-full.jpg>

## 2.1 Study area and data used

For this exercise, we will use two Sentinel-1 GRDH images using dual polarization (VV/VH) acquired in interferometric wide swath mode for the area in Paraguay, downloaded from the Dataspace Copernicus Open Access Hub [[@https://dataspace.copernicus.eu/](https://dataspace.copernicus.eu/)].

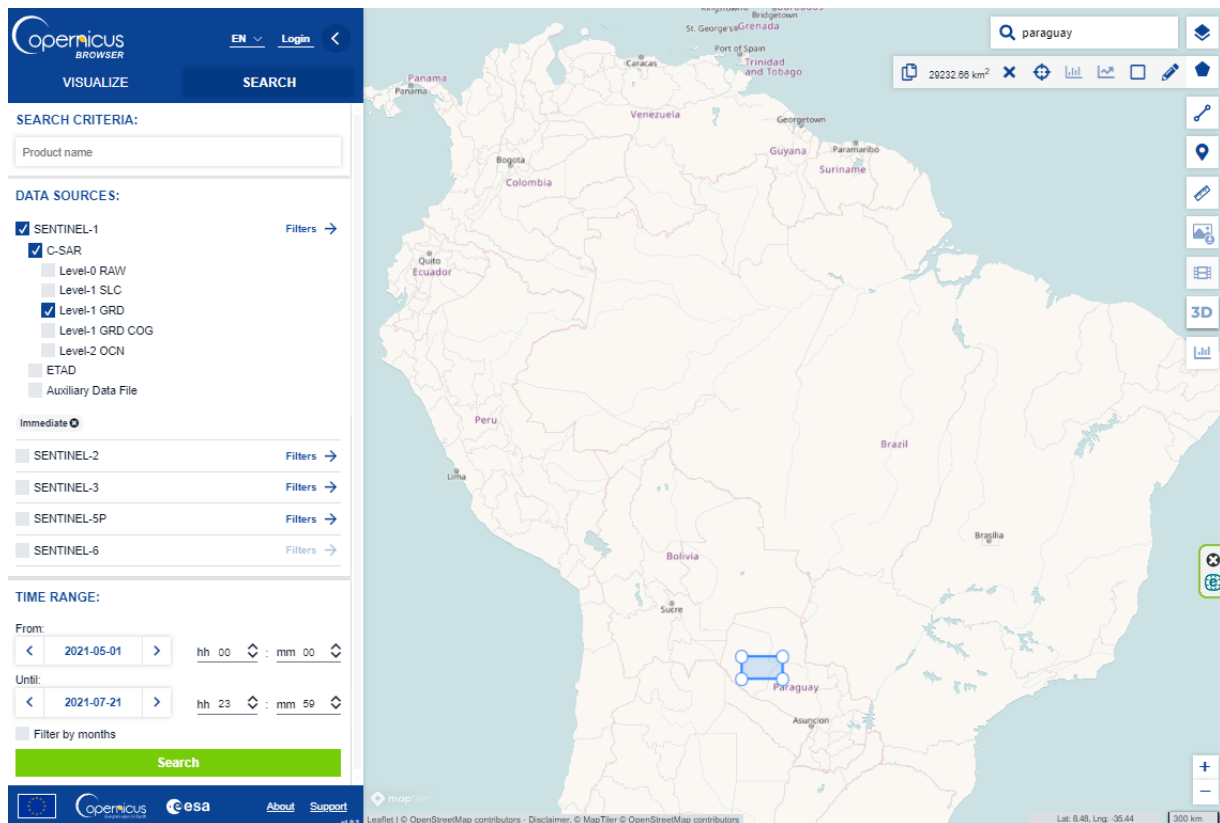

## 2.2. SNAP - Open and explore product

Open SNAP Desktop, click Open Product and open one of the downloaded products by double click on the zipped folders. The opened products will appear in Product Explorer window. The Navigation and World View tabs above the preview window can help you to locate the scene.

S1B\_IW\_GRDH\_1SDV\_20210510T092747\_20210510T092812\_026840\_0334D4\_5415.SAFE

To access the information within the product, double-click on it to reveal the directories, open the Metadata folder and double click on Abstracted Metadata.

If you open one of the bands of the image by double clicking the band name, you can see also information on the pixels in the scene by opening the tab Pixel Info (next to Product Explorer) and sliding the mouse over the pixels of interest.



[1] Abstracted\_Metadata - [S1B\_IW\_GRDH\_1SDV\_20210510T092747\_20210510T092812\_026840\_0334D4\_5415] - [Z:\Projekty\2023\_...

File Edit View Analysis Layer Vector Raster Optical Radar Tools Window Help Search (Ctrl+I)

**Product Explorer** x Pixel Info

- [1] S1B\_IW\_GRDH\_1SDV\_20210510T092747\_20210510T092812\_026840\_0334D4\_5415
  - Metadata
    - Abstracted\_Metadata
    - Original\_Product\_Metadata
  - Vector Data
  - Tie-Point Grids
  - Quicklooks
  - Bands
    - Amplitude\_VH
    - Intensity\_VH
    - Amplitude\_VV
    - Intensity\_VV

**[1] Abstracted\_Metadata** x

Name	Value	Type	Unit	Description
Orbit_State_Vectors				
SRGR_Coefficients				
Doppler_Centroid_Coeffic				
Band_IW_VH				
Band_IW_VV				
PRODUCT	S1B_IW_GRDH_1SDV_20210510T092747_20210510T092812_026840_0334D4_5415	ascii		Product name
PRODUCT_TYPE	GRD	ascii		Product type
SPH_DESCRIPTOR	Sentinel-1 IW Level-1 GRD Product	ascii		Description
MISSION	SENTINEL-1B	ascii		Satellite mission
ACQUISITION_MODE	IW	ascii		Acquisition mode
antenna_pointing	right	ascii		Right or left
BEAMS	-	ascii		Beams used
SWATH	-	ascii		Swath name
PROC_TIME	10-MAY-2021 11:37:06.249409	uint32	utc	Processed time
Processing_system_identifi	ESA Sentinel-1 IPF 003.31	ascii		Processing system identifier
orbit_cycle	160	int32		Cycle
REL_ORBIT	39	int32		Track
ABS_ORBIT	26840	int32		Orbit
STATE_VECTOR_TIME	10-MAY-2021 09:26:43.000000	uint32	utc	Time of orbit state vector
VECTOR_SOURCE	-	ascii		State vector source
incidence_near	30.172282790866234	float64	deg	
incidence_far	45.86733632952139	float64	deg	

Navigation... Colour Ma... World ... x

Lat -22.21... Lon -61.01... Elev 18...

[1] Intensity\_VH - [S1B\_IW\_GRDH\_1SDV\_20210510T092747\_20210510T092812\_026840\_0334D4\_5415] - [Z:\Projekty\2023\_ESA\_ENE...

File Edit View Analysis Layer Vector Raster Optical Radar Tools Window Help Search (Ctrl+I)

**Product Explorer** x Pixel Info

Position

Image-X	20208	pixel
Image-Y	3504	pixel
Longitude	60°45'21" W	degree
Latitude	22°13'38" S	degree

Time

Bands

Intensity_VH	5329.000000	intensity
--------------	-------------	-----------

Tie-Point Grids

Flags

Snap to selected pin

Navigation... Colour Ma... World ... x

Off Globe Downloading

8 Y 3504 Lat 22°13'38" S Lon 60°45'21" W Zoom 1:47.9 Level 5 Pixel Spacing: 10.17 m 9.99 m

## A: SINGLE-DATE ANALYSIS

### Create a subset

There is no need to process the whole image, instead, we can reduce the loaded data to a more manageable size – creating subset. This approach will decrease processing time in subsequent stages, especially when the analysis is concentrated on a specific area rather than the entire scene.

You can define the subset area by either zooming into the region of interest or by defining pixel or geographic coordinates. In this exercise we use the following geographic coordinates, that you can enter manually:

Navigate to Raster – Subset tab

and at Switch to “Geo Coordinates” in Spatial Subset tab

Enter the following numbers:


North latitude bound: -22.774

West longitude bound: -60.334

South latitude bound: -23.278


East longitude bound: -61.631

Confirm with OK.

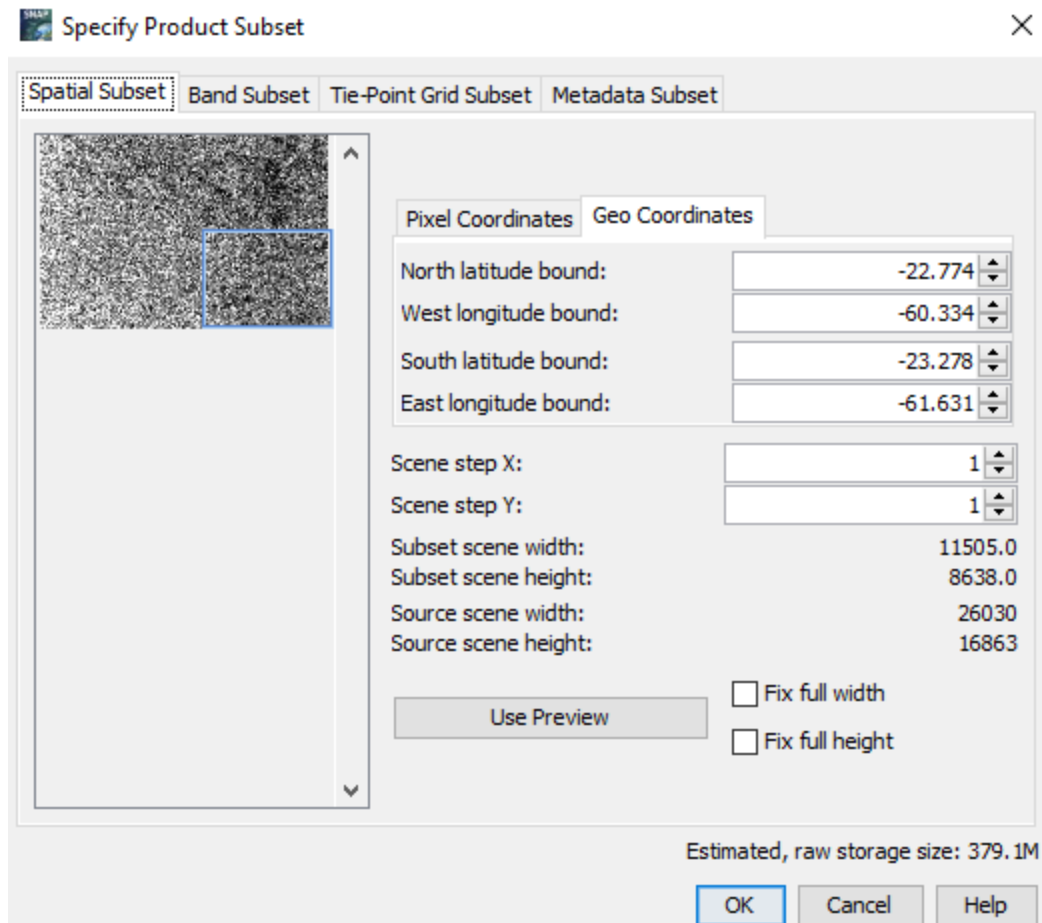




The new subset will appear in your Product Explorer window. You can open one of its bands by double-click on the selected band if you expand Bands folder within the product.

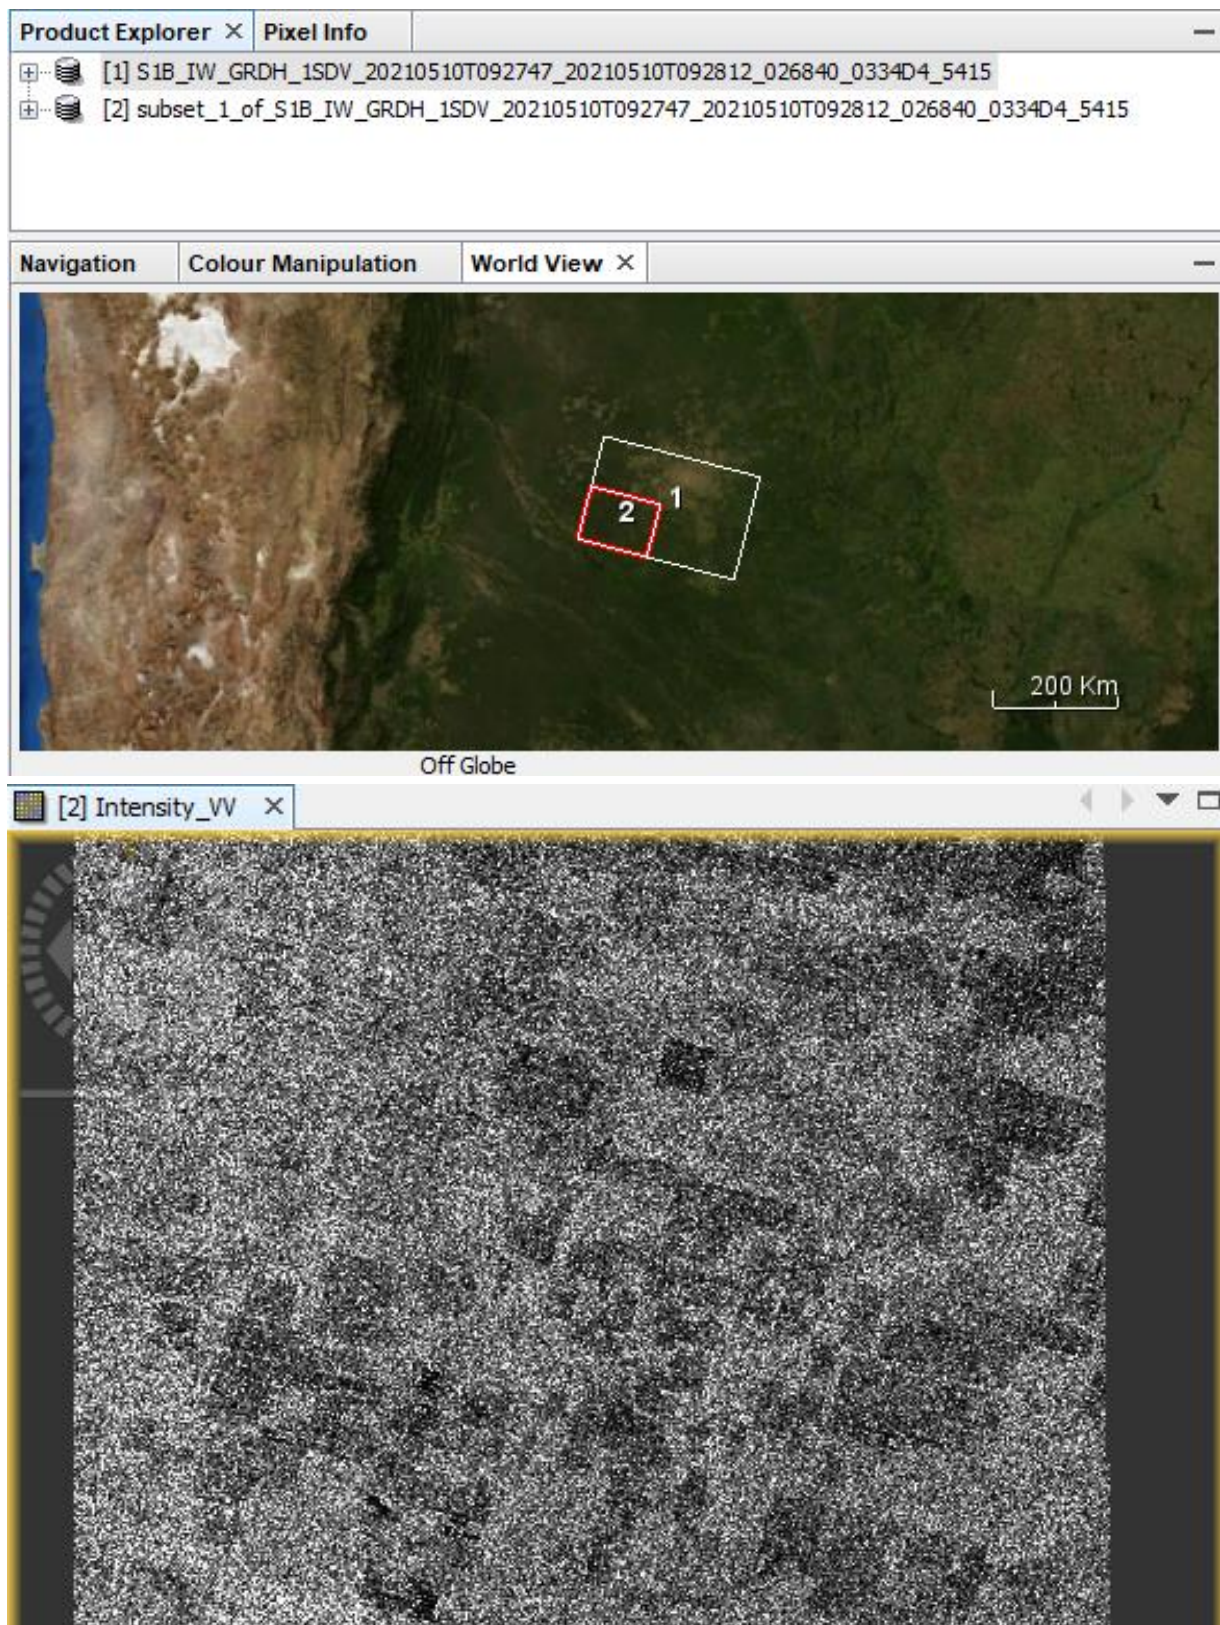

## Apply orbit file


- Navigate to Main Menu – Radar – Apply orbit file
- In the I/O Parameters tab, select the subset product and name the target product. There is no need to save the output as BEAM-DIMAP
- In the Processing Parameters accept the default settings and select the option „Do not fail if new orbit file is not found“

Note: If precise orbits are not yet available for your product, restituted orbits can be selected which may not be as accurate as the Precise orbits but will be better than the predicted orbits available within the product.

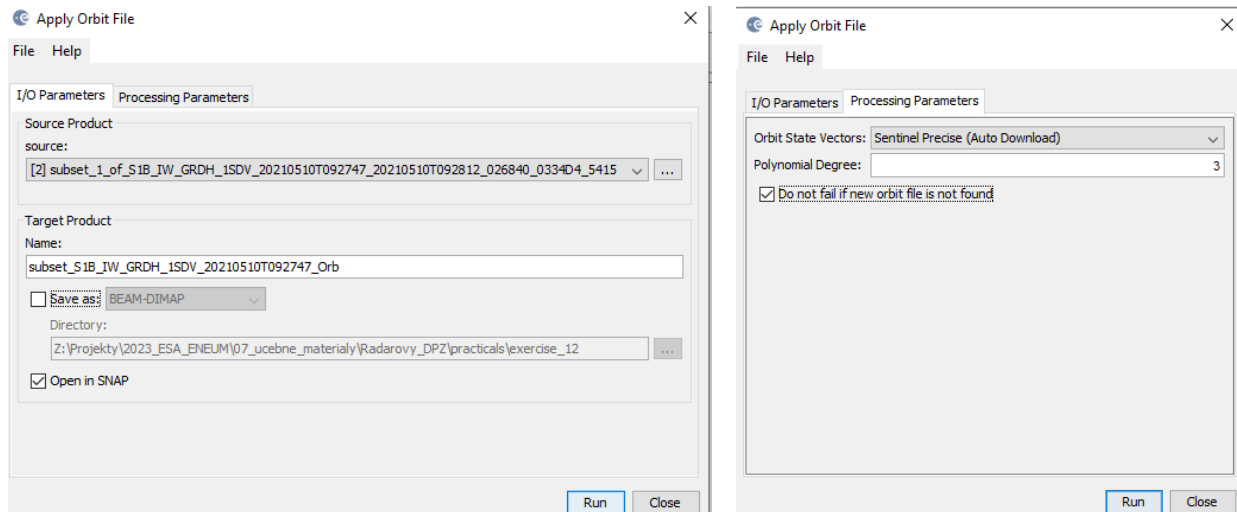

## Apply radiometric correction


- Go to Radar > Radiometric > Calibrate and select the result product from previous step
- Under the Processing Parameters tab select both polarizations and select the **Output beta0** band option. The radiometric correction is necessary to remove any image-dependent radiometric bias.

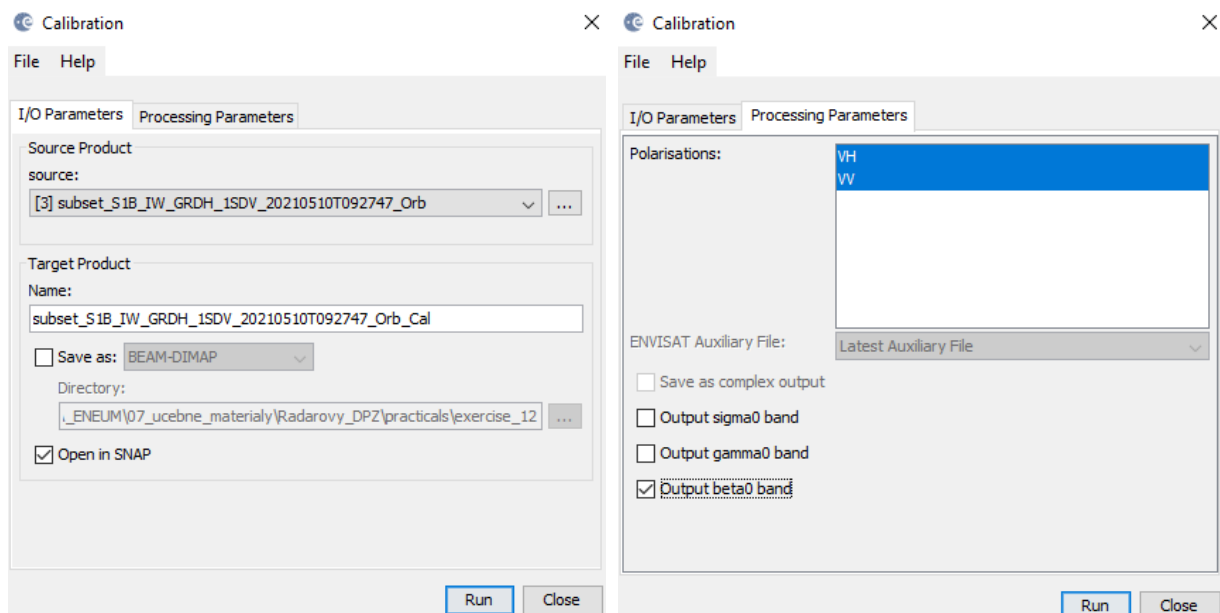



## Radiometric Terrain Flattening

- Flatten Terrain
- Go to Radar > Radiometric > Radiometric Terrain Flattening
- Under Processing Parameters select SRTM 1Sec HGT (Auto Download)
- For DEM Resampling Method, use Bicubic\_interpolation

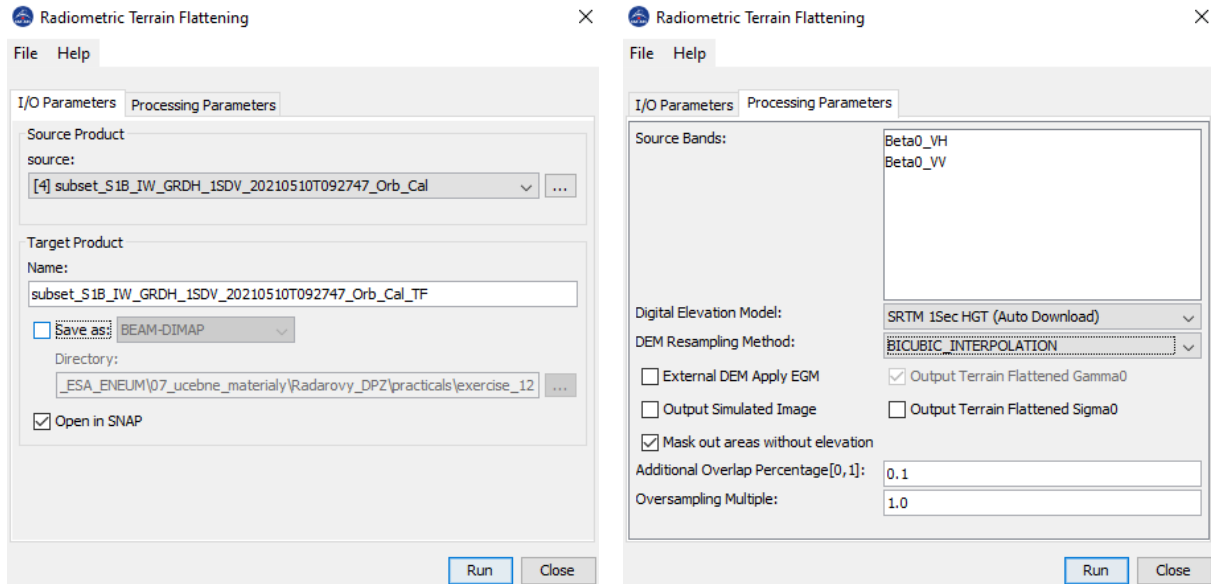


The output of this process will be transformed Beta0 into Gamma0

## Multilooking

Go to Radar > Multilooking:





In "Processing Parameters" multilook the image by a factor 5x5 - change "Number of Range Looks" and "Number of Azimuth Looks" both to 5. If the "GR Square pixel" option is enabled, an equal number of looks will be applied in both the azimuth and range directions.

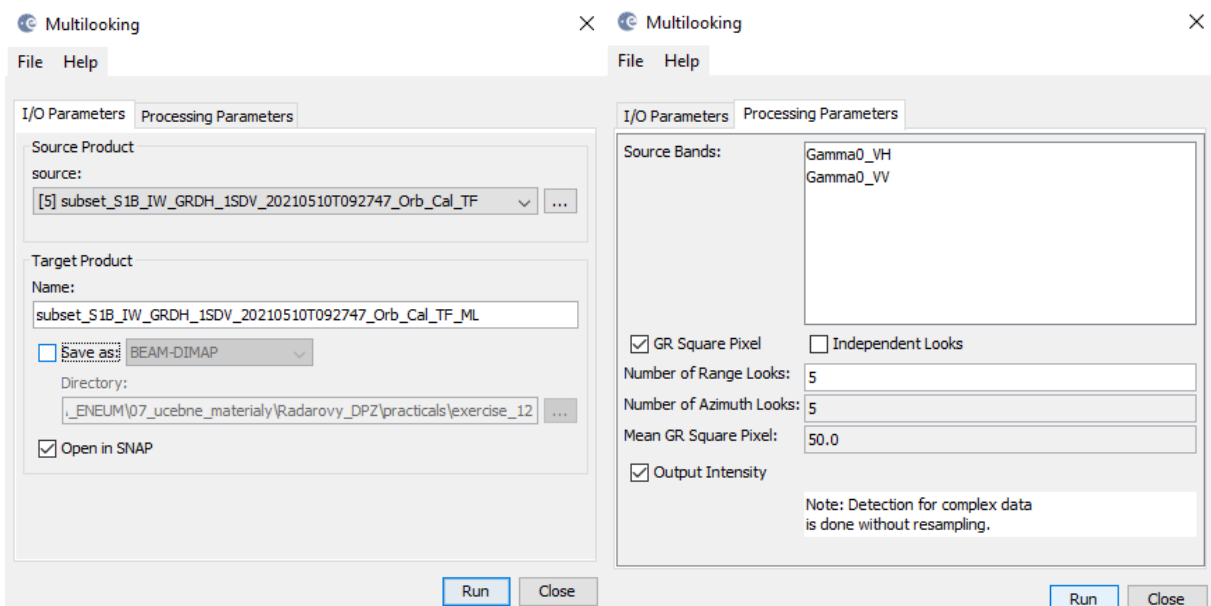

## Create elevation band

Go to Raster > DEM Tools > Add Elevation Band:


- Select the appropriate elevation band to add to the image, e.g. SRTM 3 sec (AutoDownload)
- After having added the elevation band, go to Radar > Geometric > Terrain Correction > SAR Simulation and run the SAR simulation.

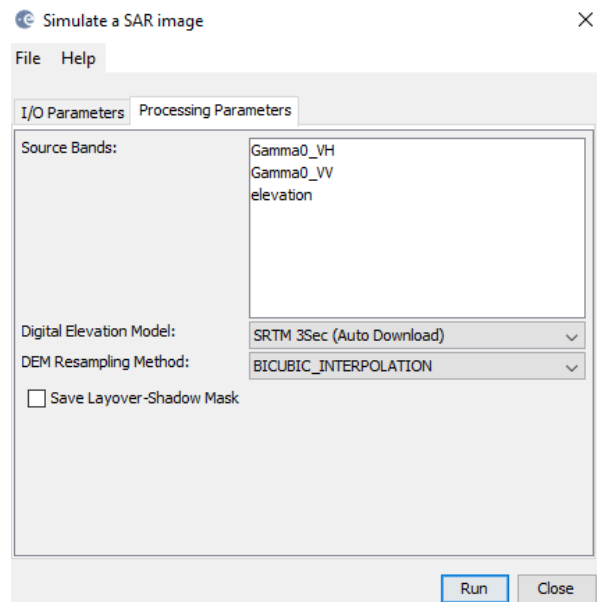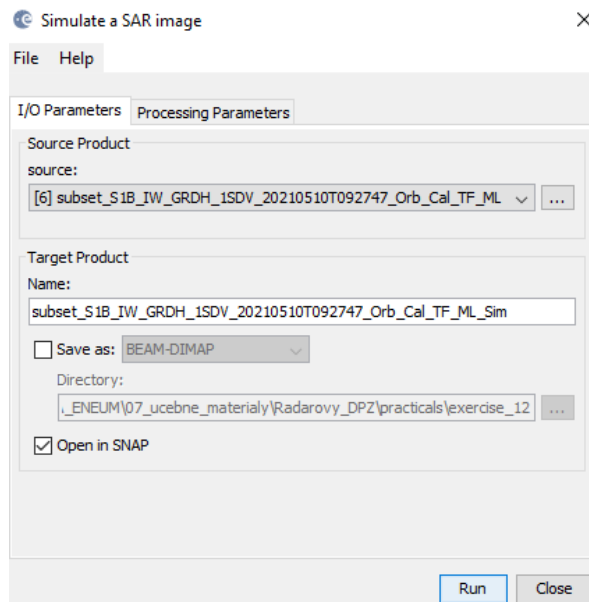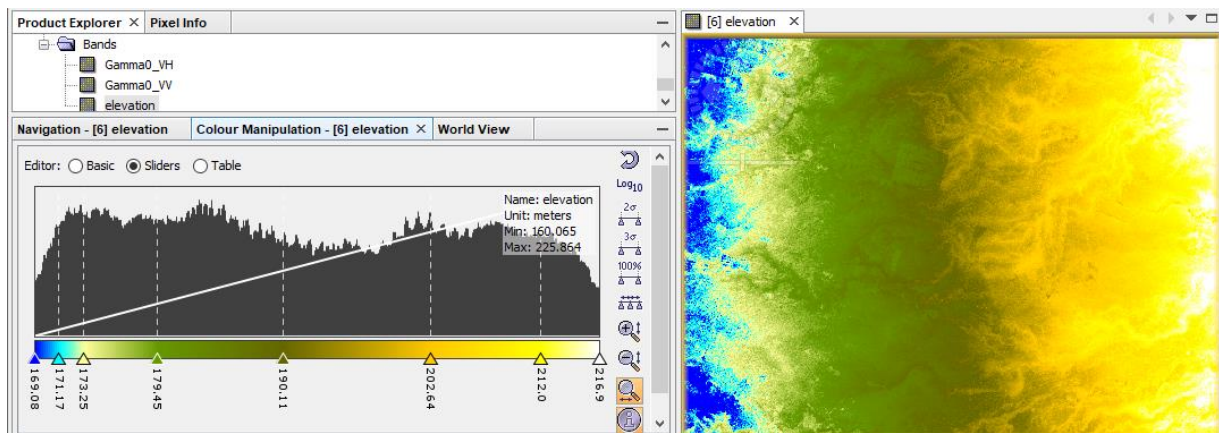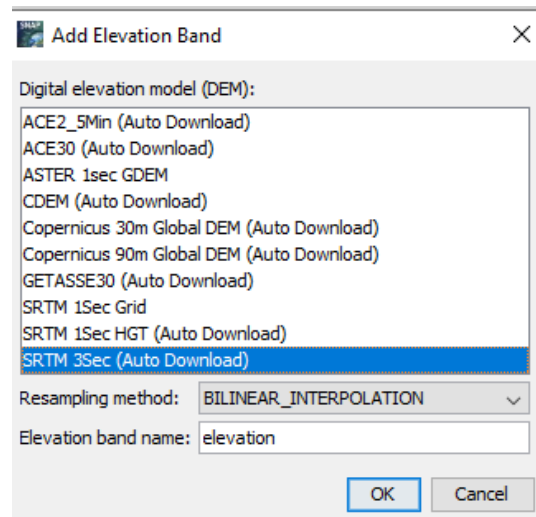

## Terrain Correction

Go to Radar > Geometric > Terrain Correction > Range-Doppler Terrain Correction

- In the I/O Parameters select the last simulated product
- Under Processing Parameters tab select:
  - Digital Elevation Model: SRTM 3Sec (Auto Download)
  - DEM Resampling Method: Bilinear Interpolation
  - Check the "Mask out areas without elevation" box
  - Check the "Apply radiometric normalisation" box

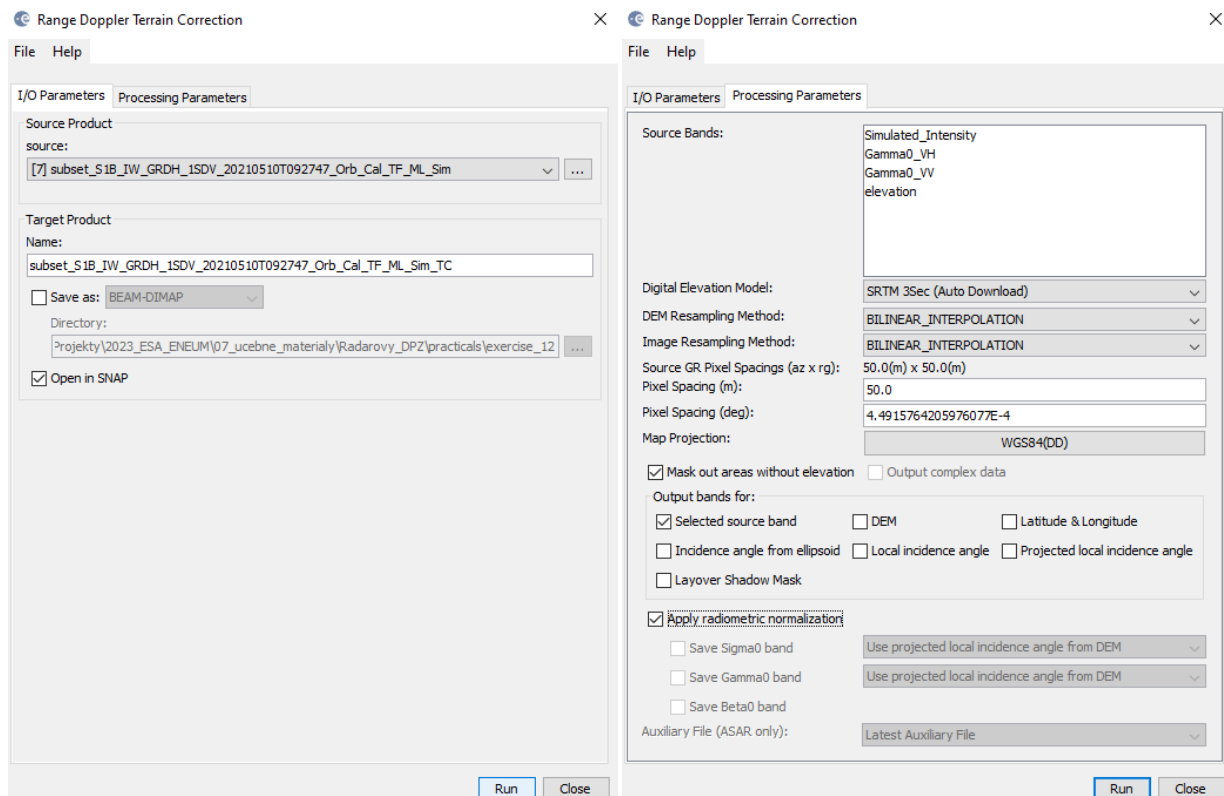

## Convert gamma0 to dB

In the Product Explorer select first the Gamma0\_VH band, then go to Raster > Data Conversion > Linear to/from dB and repeat with the Gamma0\_VV band.

This will create two Virtual bands (with a V icon). Right click on each > Convert Band to transform them.



## Compute difference image from gamma0 [dB]: VV-VH

Open Raster > Band Maths:

Name it "Gamma0-VV\_VH". Click on 'Edit Expression' and enter the expression  $\text{Gamma0\_VV\_dB} - \text{Gamma0\_VH\_dB}$

Convert virtual raster



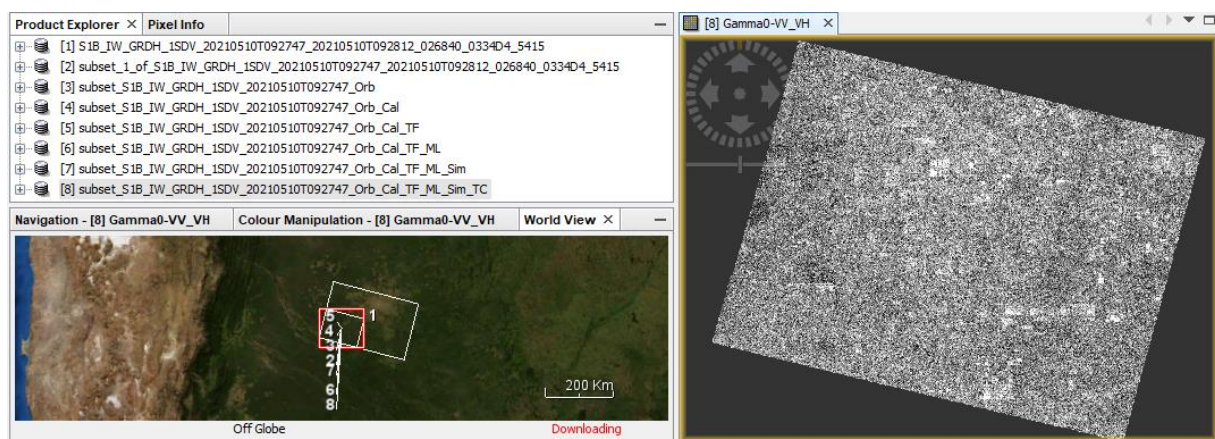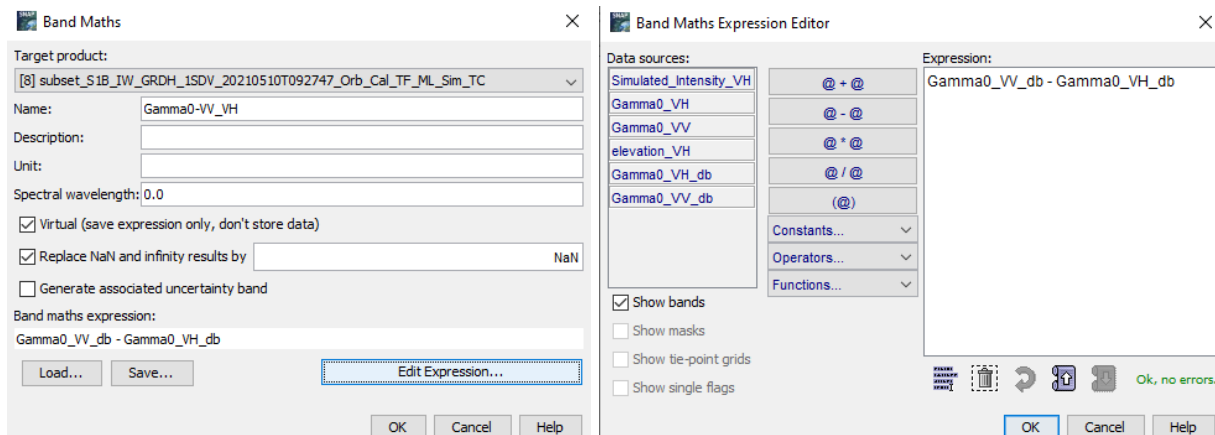


## Display as RGB view

Go to Window > Open RGB Image Window (or right-click on the last product in the Product Explorer and Open RGB window) and select:

Red: the difference band „Gamma0\_VV\_VH“

Green: „Gamma0\_VH\_db“


Blue: „Gamma0\_VV\_db“

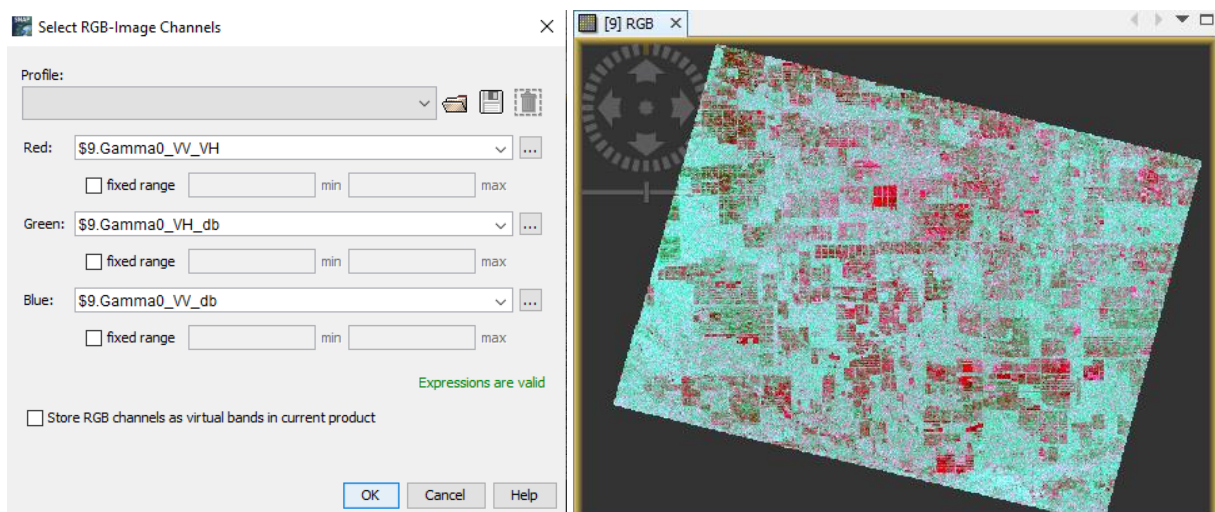

## Statistical analysis


### Scatterplot

Open Analysis > Scatter Plot and in the right panel select the Gamma0\_VH\_dB as X-axis input and Gamma0\_VV\_dB as Y-axis input, then click the Refresh View button.

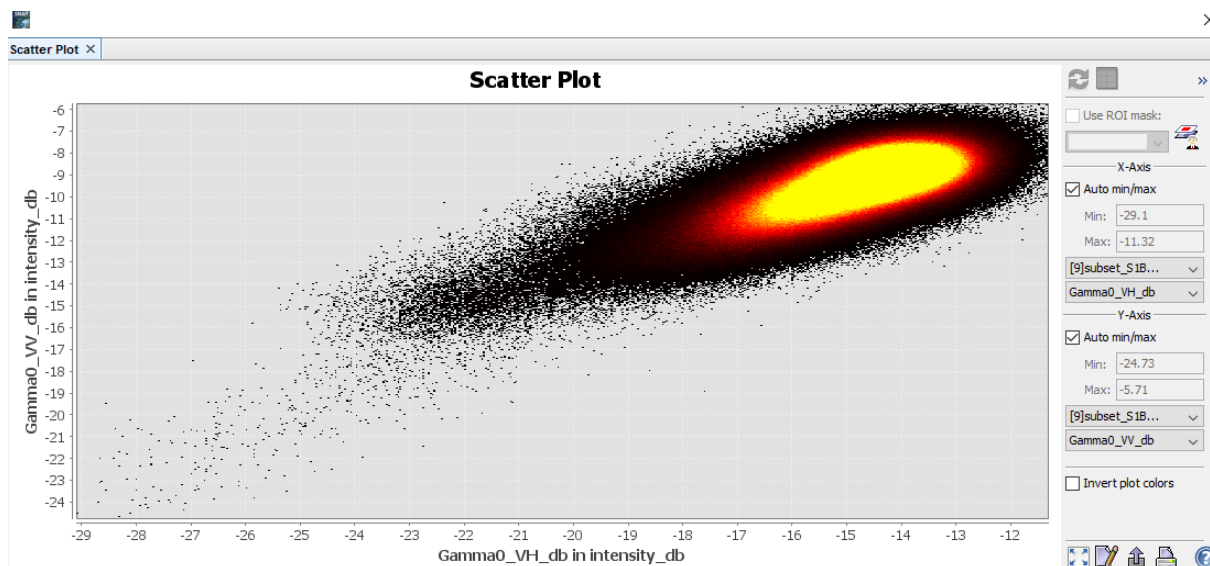


### Histogram

Select e.g. the Gamma0\_VH\_dB band and open Analysis > Histogram. Click the Refresh View button.

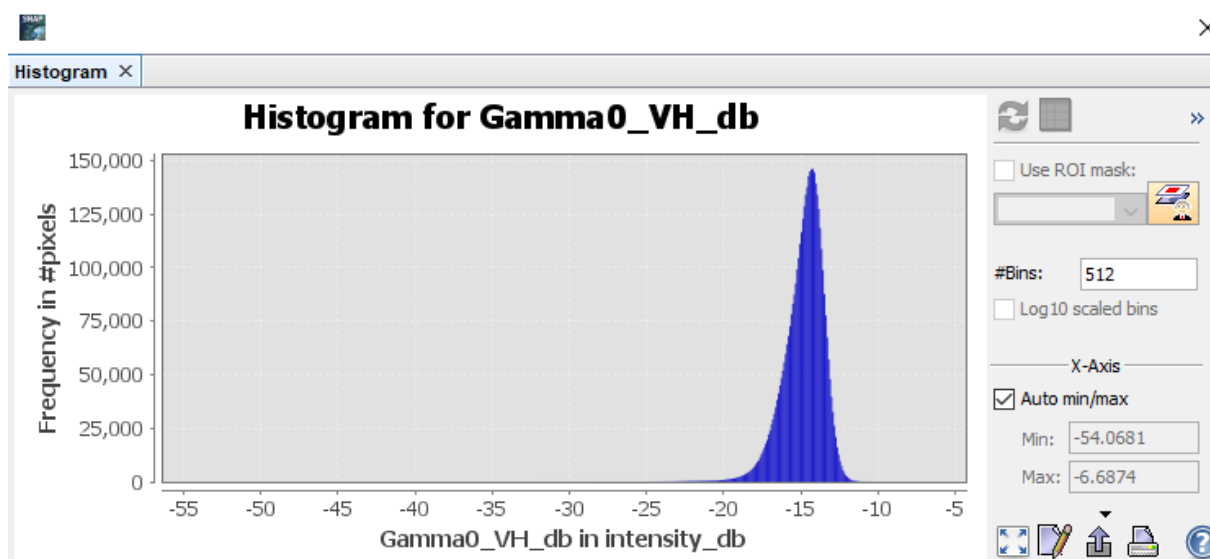

## Profile Plot

Select the Gamma0\_VV\_VH band. In the toolbar select the Polygon or the Line tool and draw a shape on your region of interest. Open Analysis > Profile Plot. This operation can be done for any of the other bands.

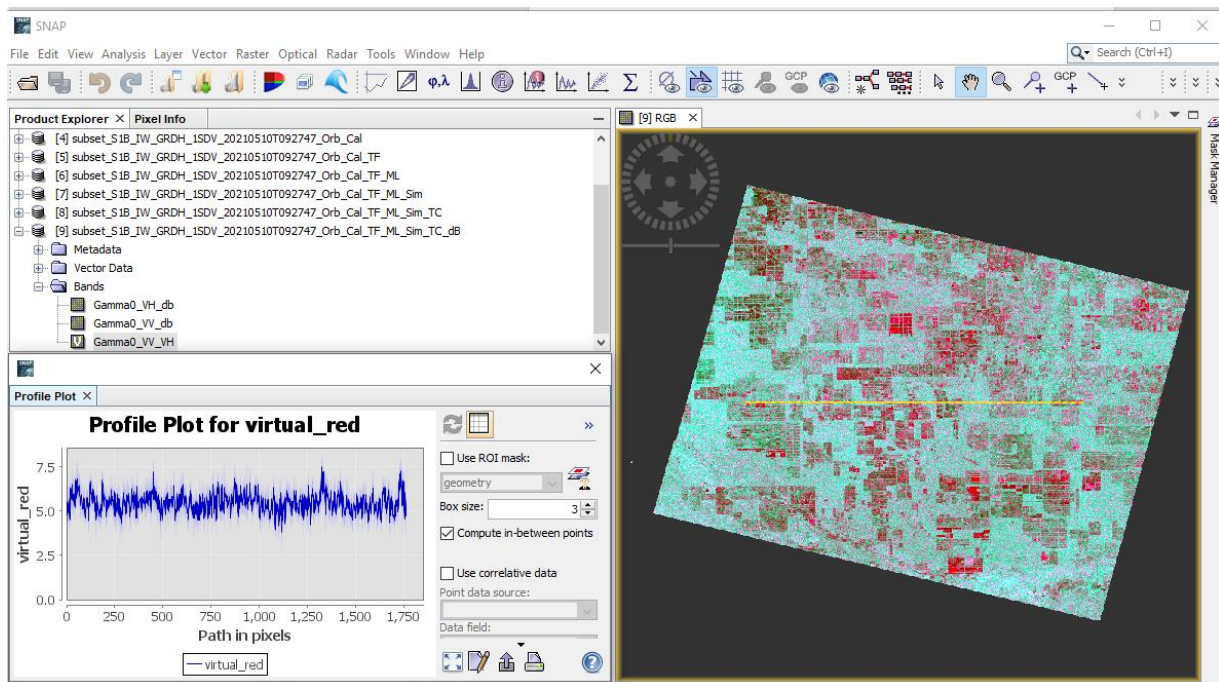



## B: MULTITEMPORAL ANALYSIS

Load both Sentinel-1 products by navigating to File - Open Product.

### Build a pre-processing graph

Use the graph builder tool to create workflow for data processing:

Go to Tools>GraphBuilder

Right click and add, in the order below, each of the preprocessing steps:

The first tool is Read

Add>Radar>Apply-Orbit-File and keep pre-defined parameters. Check „Do not fail if new orbit file is not found“

Add>Radar>Radiometric>Calibration and select Output beta0 band


Add>Radar>Radiometric>Terrain Flattening will add terrain flattening


Add>Radar>Geometric> Terrain Correction>Terrain Correction

The last tool is Write

Click on each tool, and connect them by dragging the red arrows from one tool to the next, respecting the order above

Then got to File>Save Graph to save the workflow as a XML file.

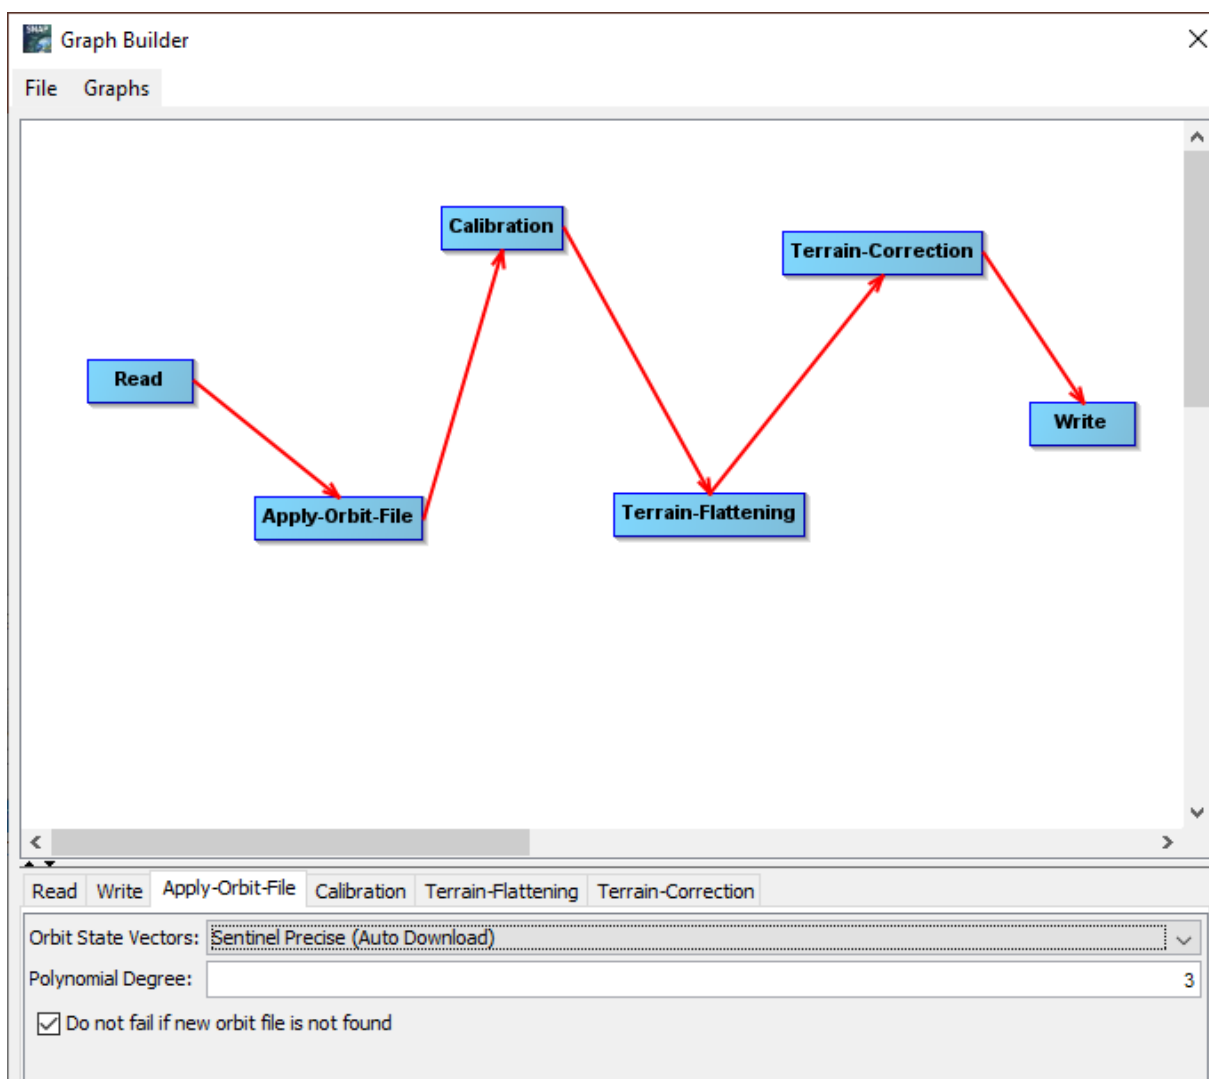


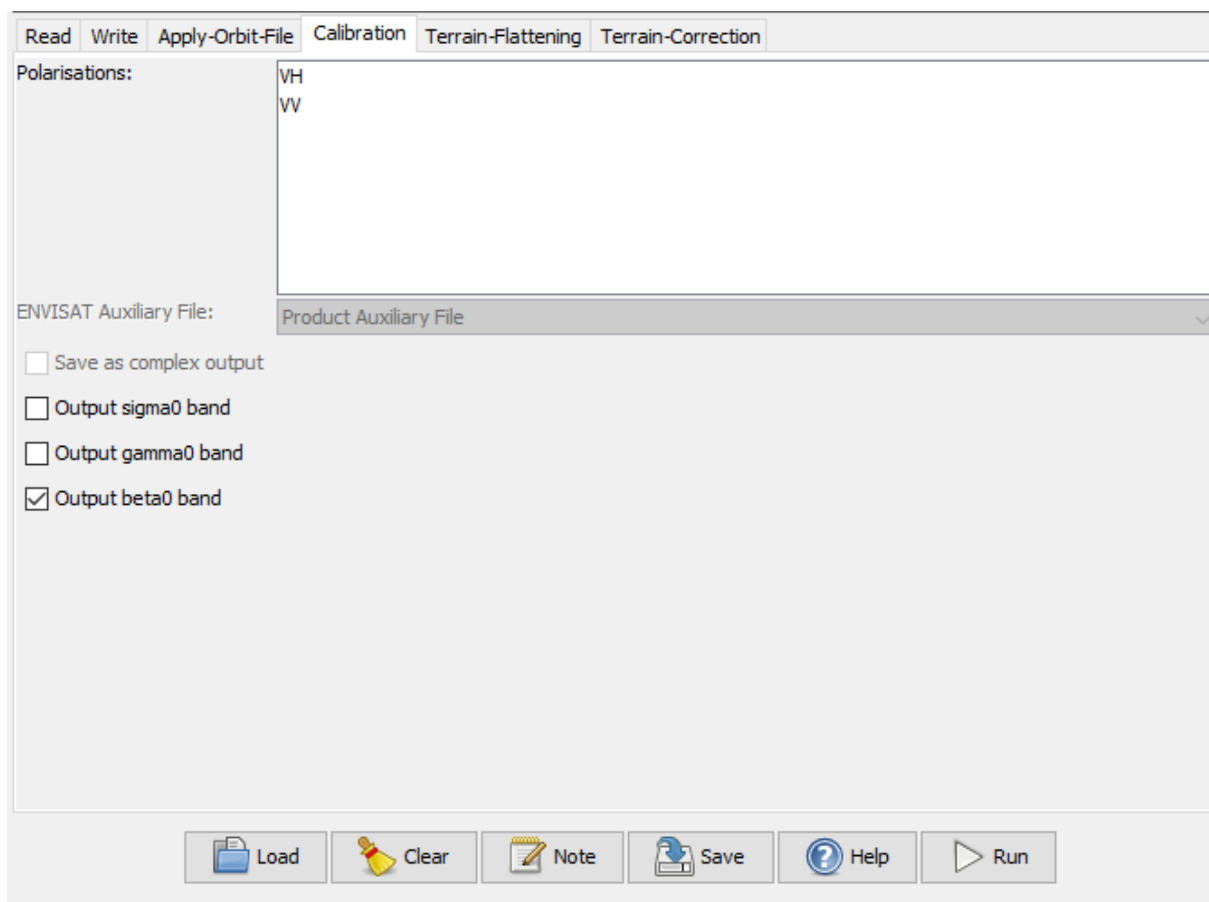



### Batch processing

Navigate to Tools > Batch Processing:

Using the Add opened symbol select the files you want to process.

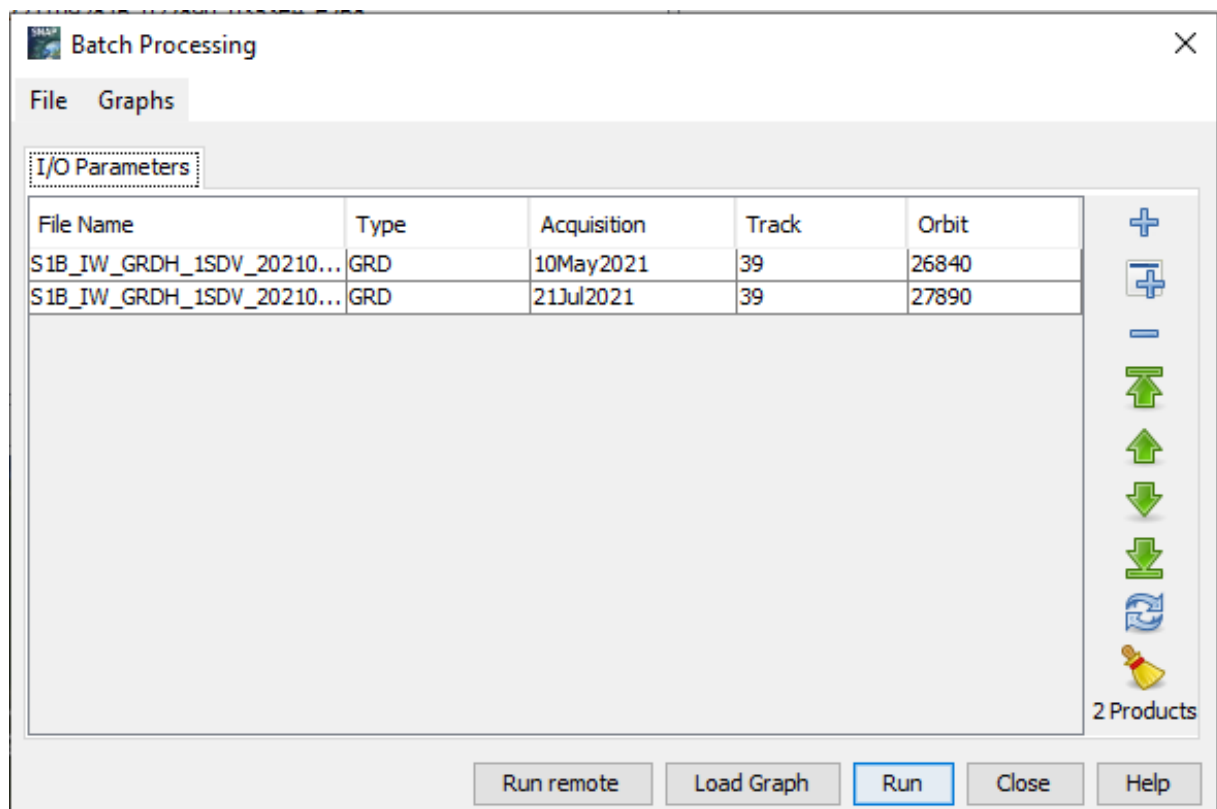

Using the Load Graph button, load the .xml-file you just saved

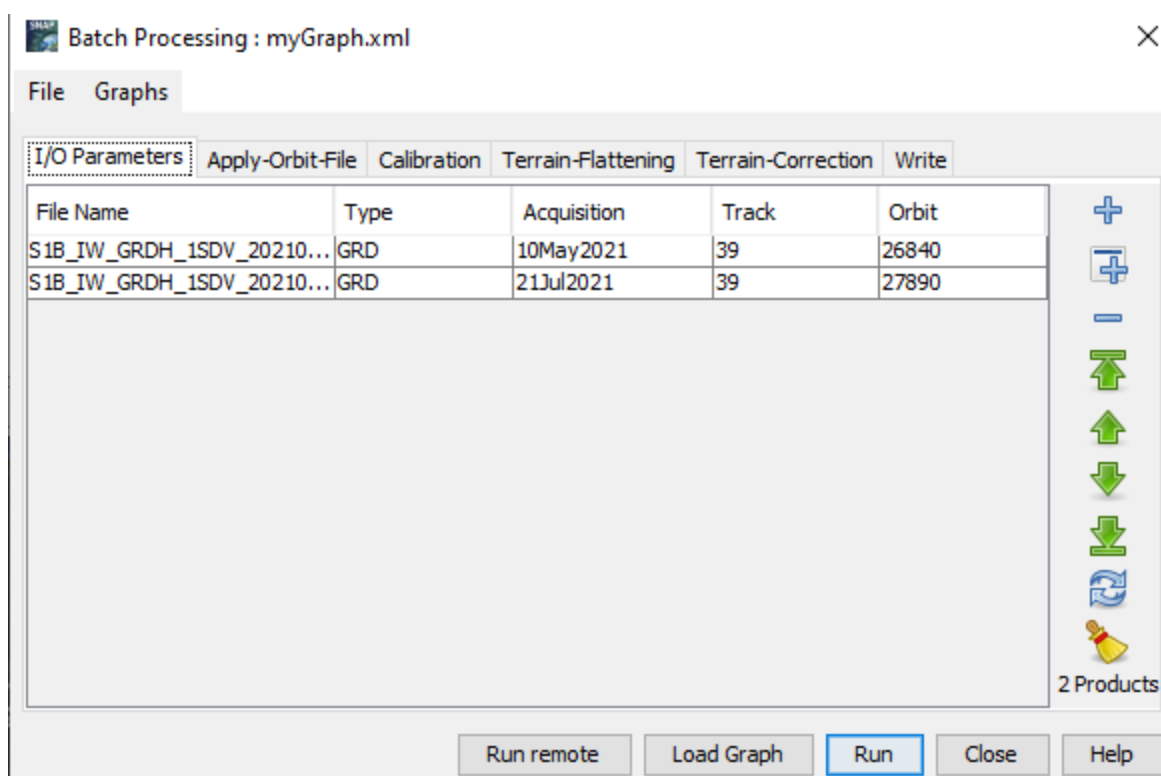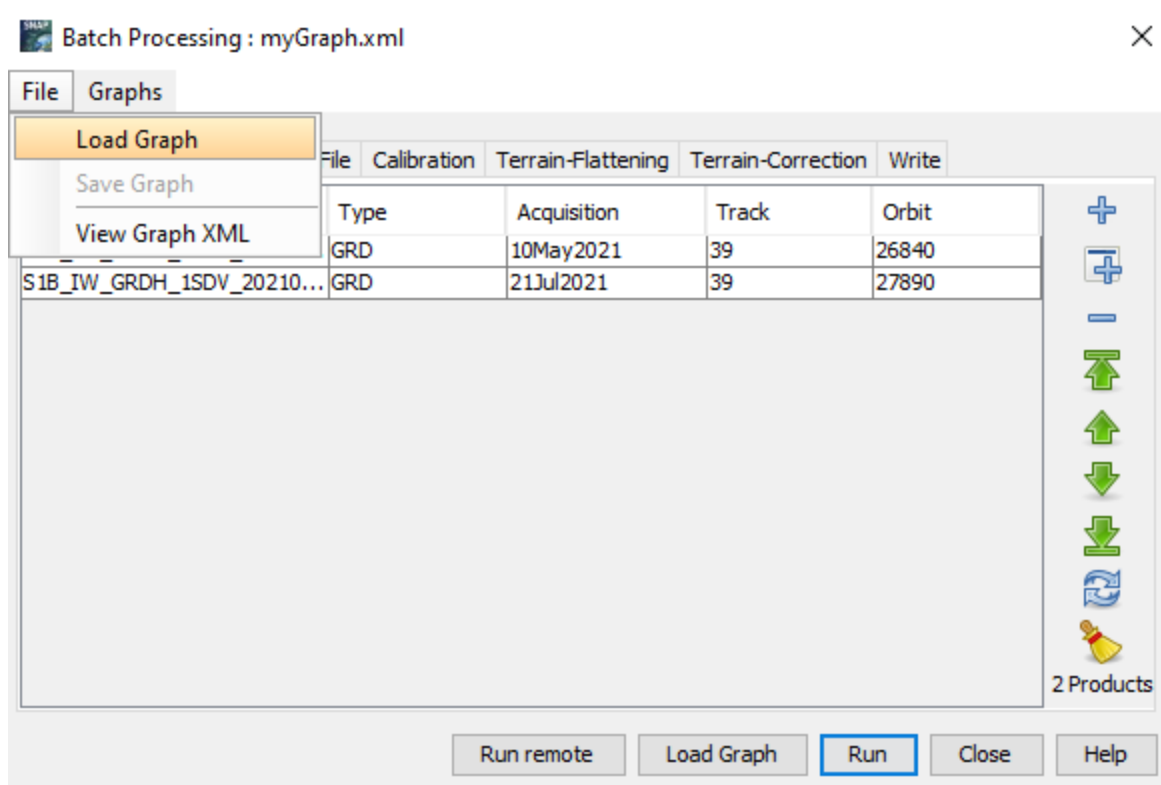


Adjust the output folder, click Run.

Note: this step might take several minutes/hours to run.



View the output product, e.g. by double-click on Gamma0\_VH terrain corrected band.

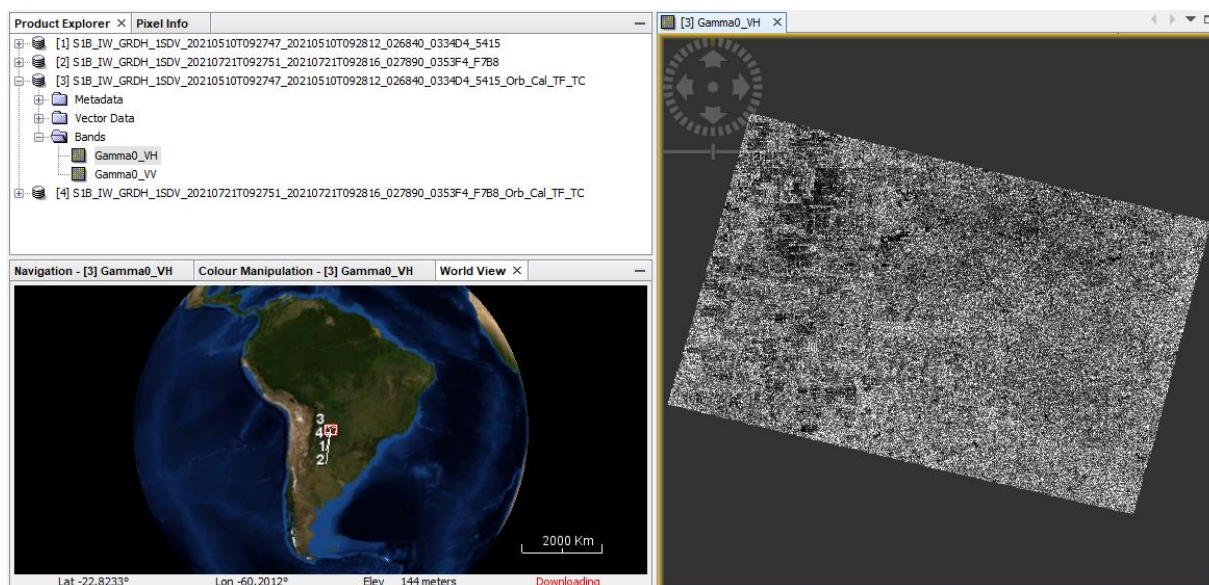



## Create stack

Go to Radar > Coregistration > Stack Tools > Create Stack

In the CreateStack tab, select Product Geolocation as Initial Offset Method


In the Write tab, adjust the stack name if needed, adjust the output folder and click Run. This step will might take few minutes.

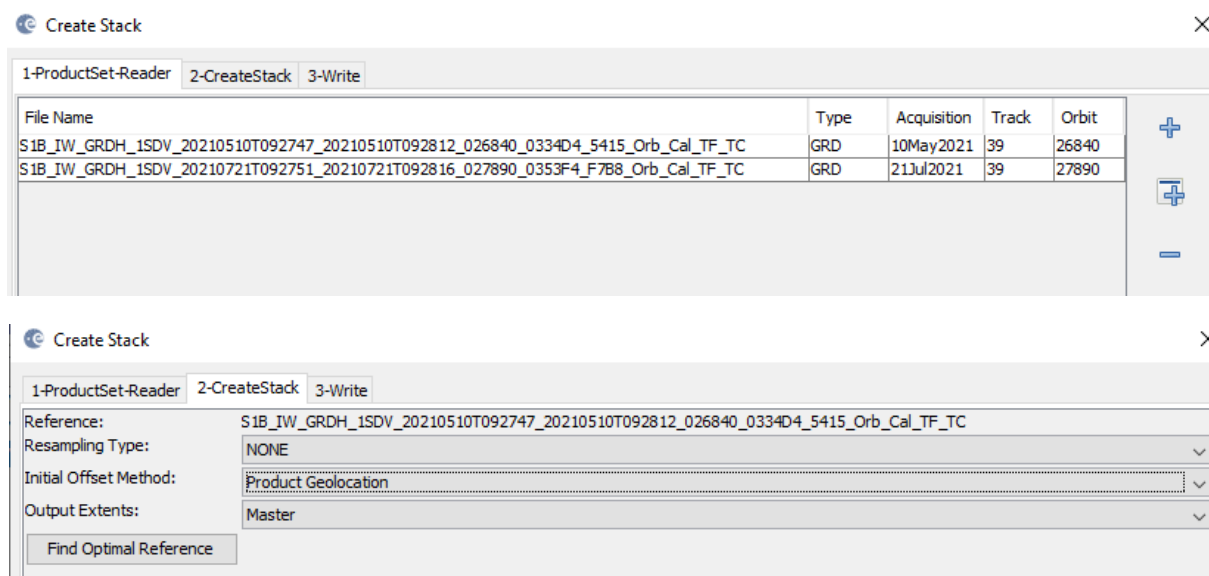

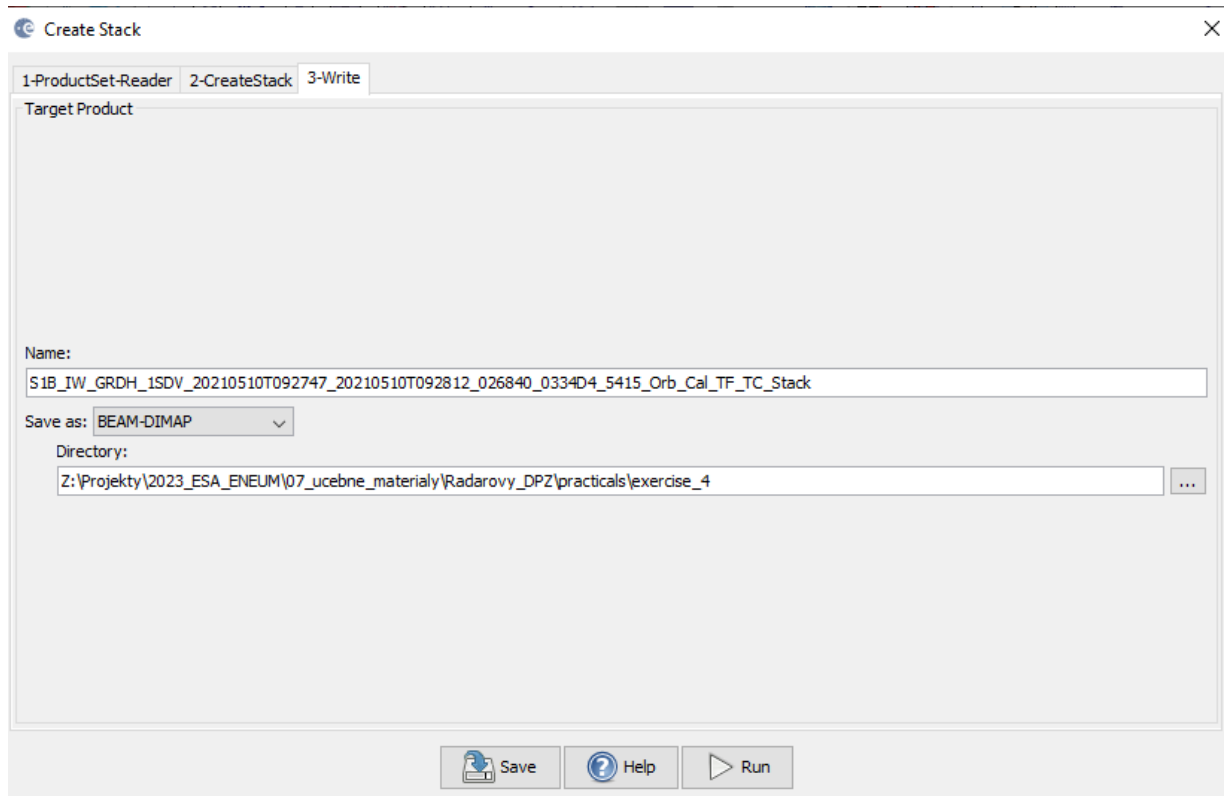



## Convert bands to dB

In the Product Explorer select the processed Gamma0\_VH band, then go to Raster > Data Conversion > Linear to/from dB and repeat with the Gamma0\_VV band.

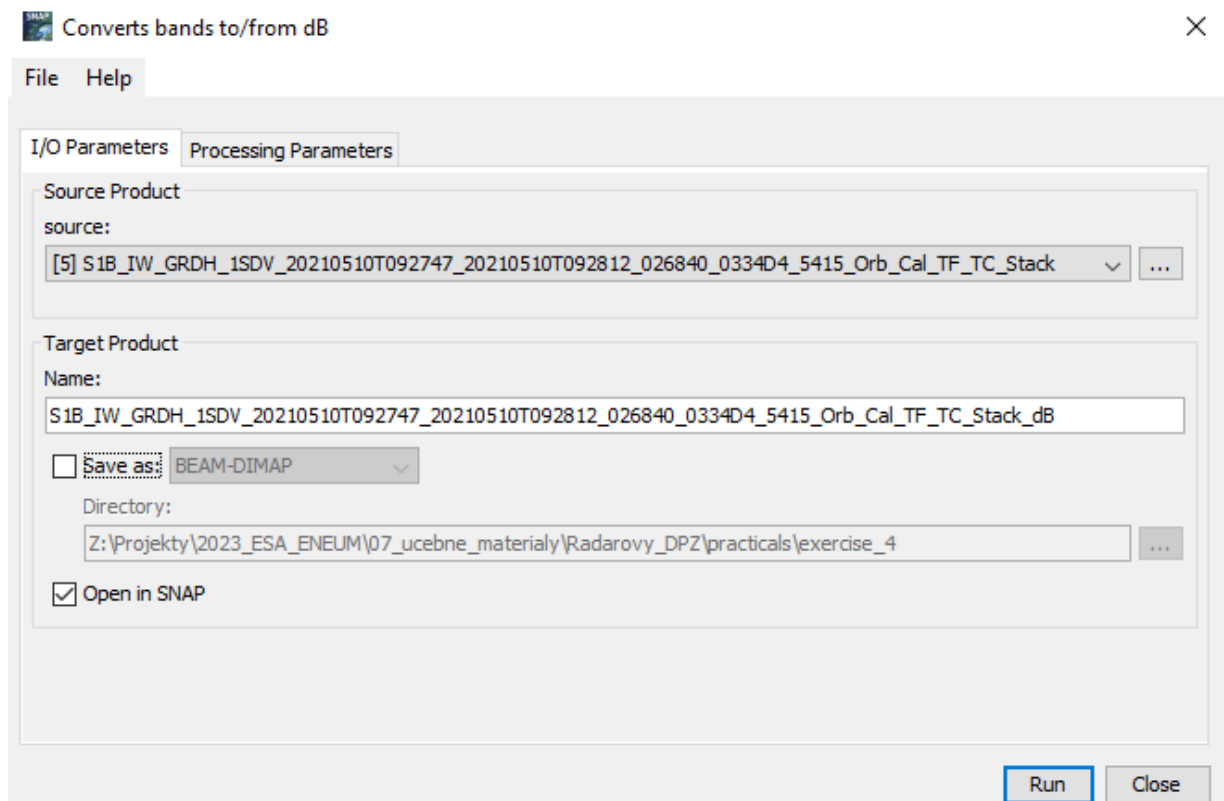

## Display an RGB

Right-click on the last product – Open RGB Image Window and select different band combinations to see the change of backscatter between different acquisitions. Explore values over forest area and fields.

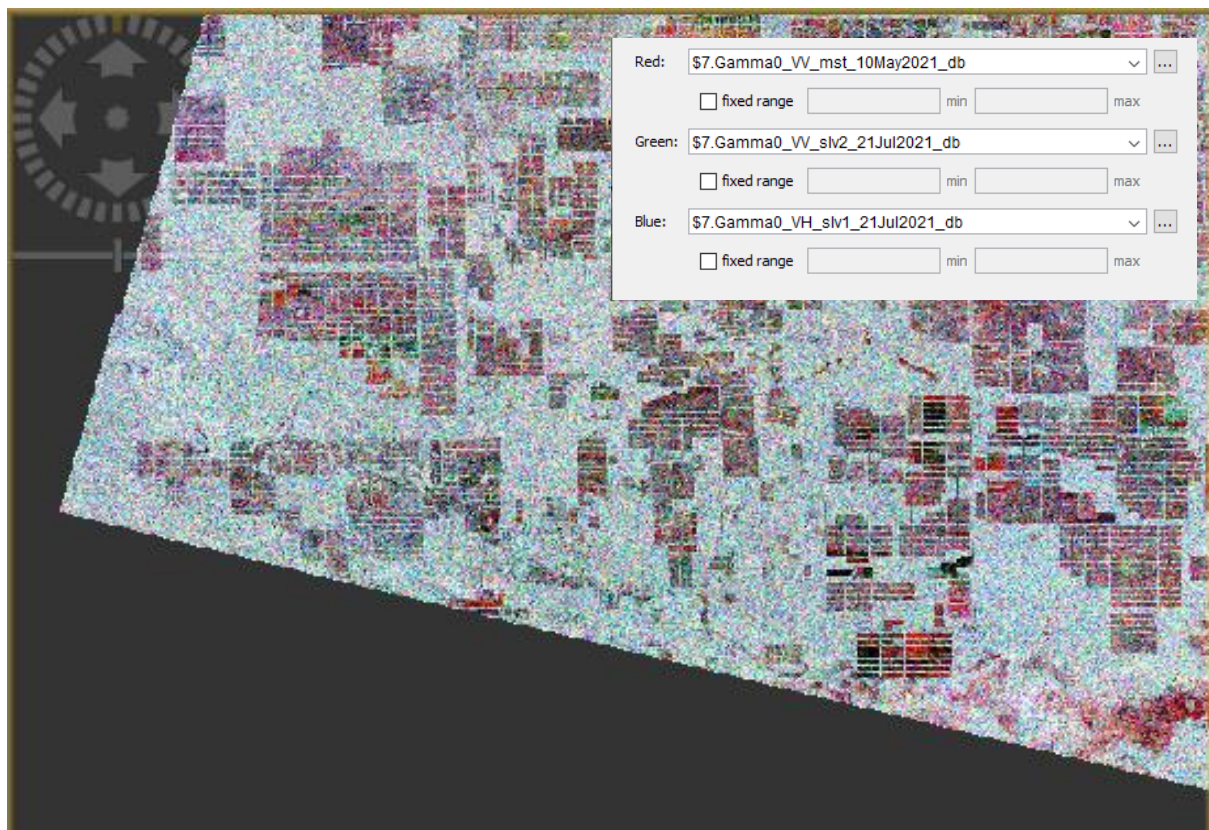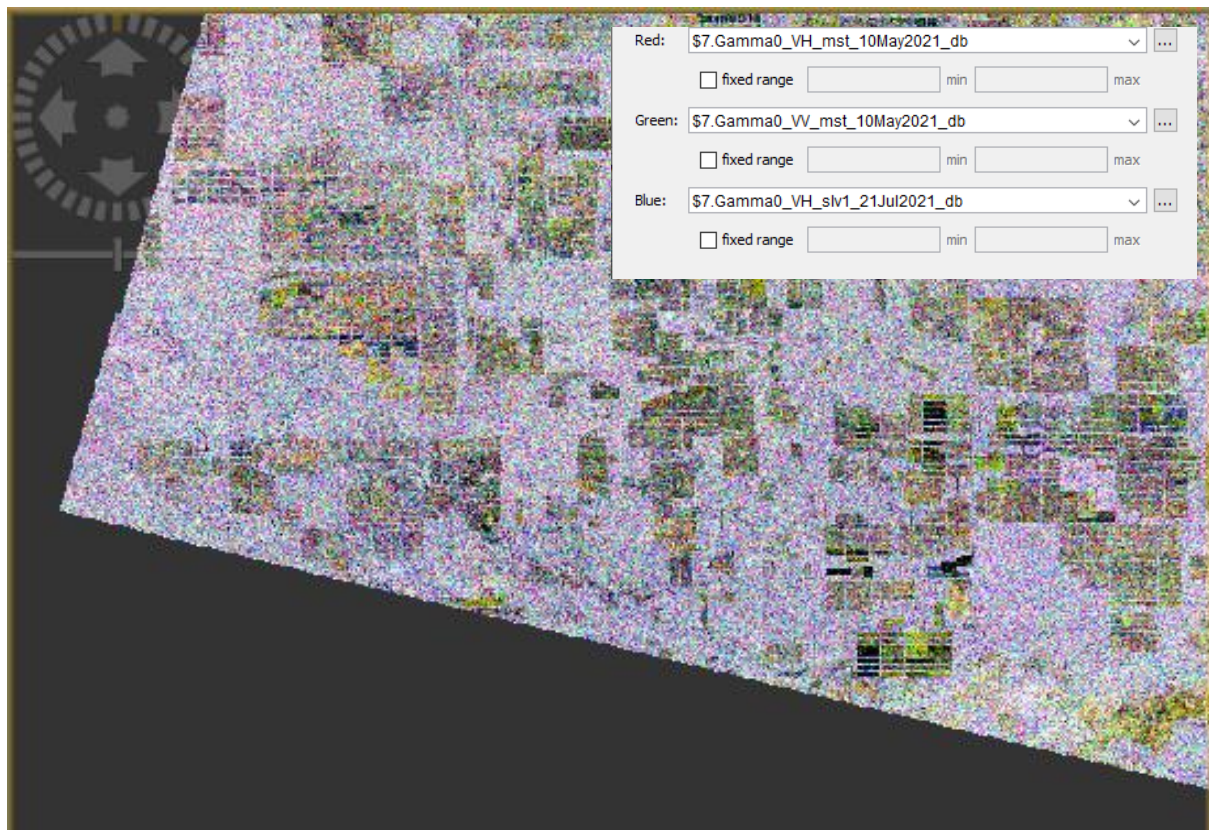




## Time Series Analysis (using single scenes, not a stack)

Tool cannot use a stack, it needs single images instead

Navigate to View > Tool Windows > Radar > Time Series to open the Time Series tab at the bottom left of your SNAP window.

Click on Settings (top right of Time Series tab) and add individual (pre-processed) images. Click Apply.

Using the time series tab, hover your mouse over the area to see the behaviour of single pixels over or use Pin Manager to see the behaviour of the selected Pins.

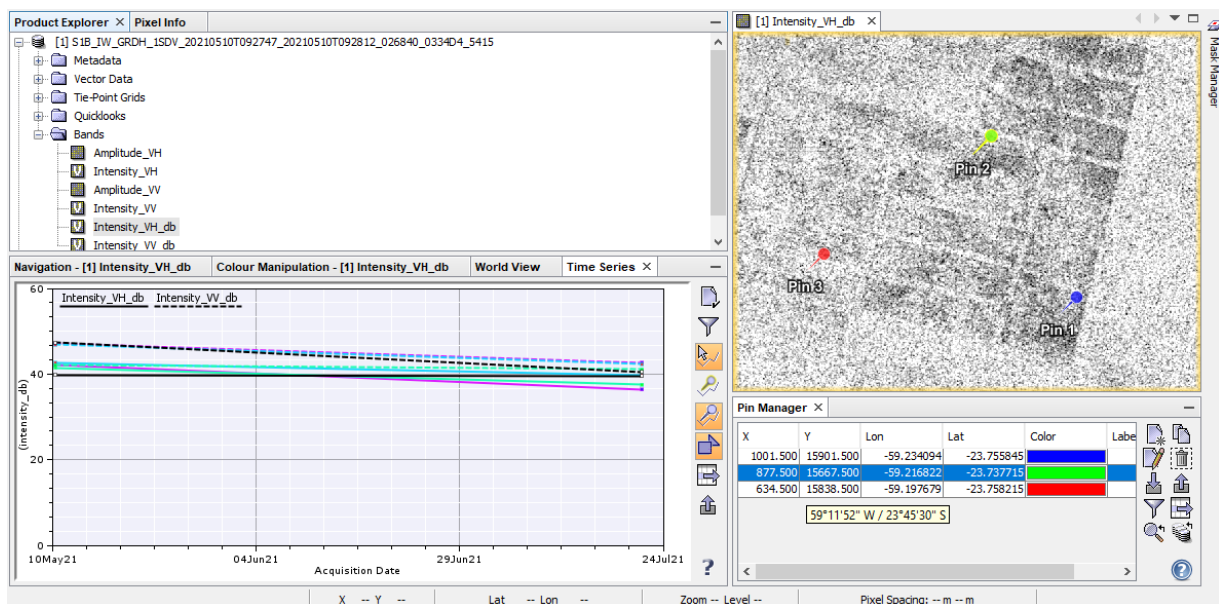

Explore values to identify forest area and fields.

**THANK YOU FOR FOLLOWING THE EXERCISE!**